

LifeSmart APP User Manual

Revision

Revision History	Release note	Revisor	Date
Version 1.0	First edition, based on app ver. 1.1.41p10	Quentin Jiang Scott Ruan	24/03/2020

Content

LifeSmart APP User Manual	1
1. Getting the APP.....	4
1.1 How to download.....	4
1.2 How to Log in / Sign up.....	4
2. Home Page.....	7
3. Main Settings Menu.....	9
3.1 Account Management.....	10
3.1.1 Personal Information.....	10
3.1.2 Manage Home Users.....	15
3.1.3 Change Home Users.....	17
3.1.4 Value Added Services.....	19
3.1.5 Friends of LifeSmart.....	19
3.1.6 Devices Management.....	20
3.2 Rooms and Groups.....	21
3.3 AI.....	24
3.3.1 Smart.....	25
3.3.2 Scene.....	29
3.3.3 Schedule.....	37
3.3.4 Trigger.....	40
3.3.5 Edit AI.....	41
3.3.6 Sort.....	41
3.3.7 More.....	42
3.4 Message.....	43
3.5 Settings.....	44
3.5.1 All Devices.....	45
3.5.2 Share.....	47
3.5.3 Local Smart Device.....	50
3.5.4 Advanced Settings.....	53
Device Instructions.....	61
About.....	61
3.6 Add Device.....	62
3.7 Add Device to Smart Station.....	65


1. Getting the APP

1.1 How to download

Option 1: Download the app from Google Play (for Android users) or APP Store (for iOS users) by searching LifeSmart.

Option 2: Download the app from the link on LifeSmart official website.

- 1) Open your browser on your mobile devices, type in global.ilifsmart.com, enter the front page.
- 2) Scroll down the page, choose your download method according to the system of your smart devices from 'App Download' section.

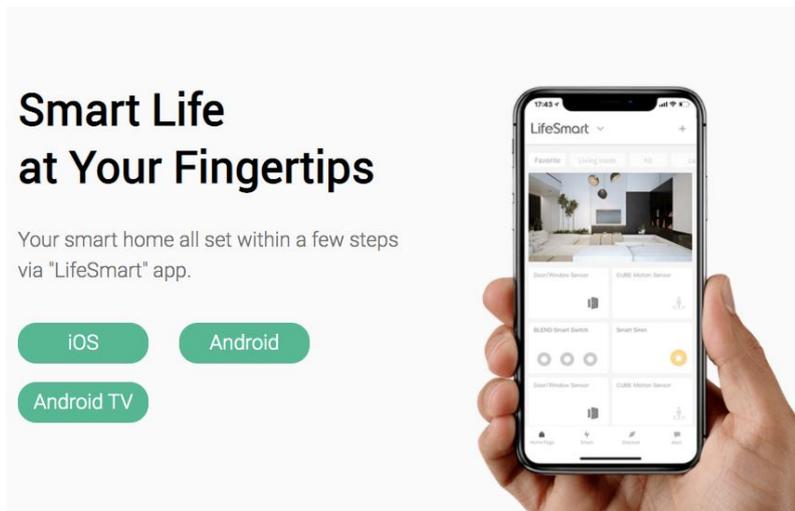

2.1) For IOS users:

Click iOS, it redirects to apple store, put the keyword 'LifeSmart' in search and get the app.


2.2) For Android users:

Click Android, there will be a installation package popped on the screen, click download to get the app.

1.2 How to Log in / Sign up


1.1.1 Sign up to LifeSmart

1) Open LifeSmart APP, click 'Sign up' to start registration to LifeSmart:

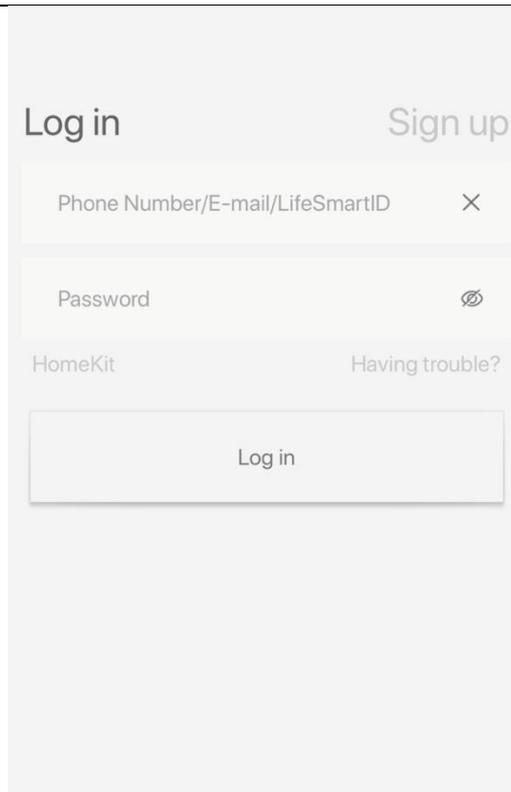


The image shows a mobile application interface for logging in or signing up. At the top left is the text "Log in" and at the top right is "Sign up". Below these are two input fields: the first is labeled "Phone Number/E-mail/LifeSmartID" with a clear 'X' icon on the right; the second is labeled "Password" with an eye icon on the right. Underneath the password field are two links: "HomeKit" on the left and "Having trouble?" on the right. A large, light-colored "Log in" button is centered below the links.

2) Select your region first and follow the instruction:

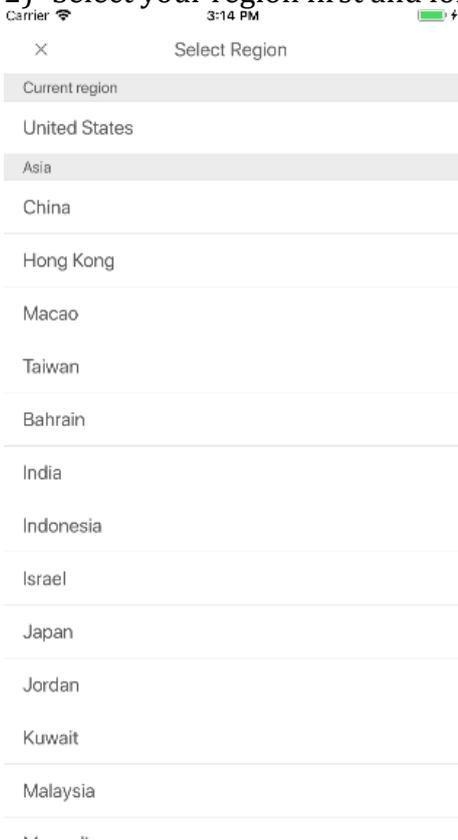

The image shows a mobile application screen titled "Select Region". At the top left is a close 'X' icon. Below the title is a list of regions. The first item is "Current region" which is highlighted with a grey bar. Below it are "United States", "Asia" (highlighted with a grey bar), "China", "Hong Kong", "Macao", "Taiwan", "Bahrain", "India", "Indonesia", "Israel", "Japan", "Jordan", "Kuwait", and "Malaysia". At the bottom of the list are three dots indicating more options.

3) For oversea users, please sign up with your email address and password;

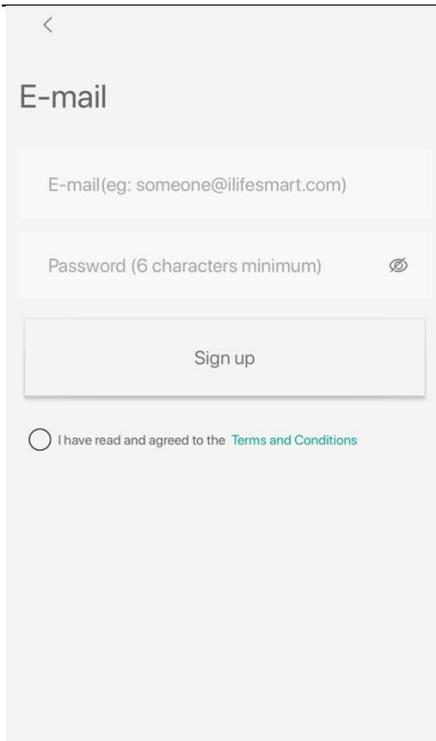


The screenshot shows a registration form titled "E-mail" with a back arrow in the top left corner. It contains two input fields: "E-mail (eg: someone@lifesmart.com)" and "Password (6 characters minimum)" with an eye icon for toggling visibility. Below the fields is a "Sign up" button. At the bottom, there is a radio button followed by the text "I have read and agreed to the [Terms and Conditions](#)".

4) Click 'Sign up' to finish registration and it will lead to the homepage;

1.1.2 Log in to LifeSmart

Open LifeSmart APP, enter your E-mail address / LifeSmart ID and password to log in.

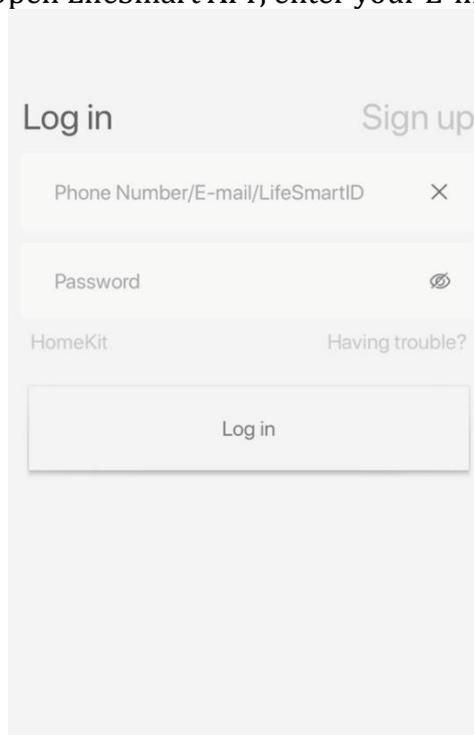

The screenshot shows the login screen with "Log in" and "Sign up" options at the top. It features two input fields: "Phone Number/E-mail/LifeSmartID" with a clear 'X' icon, and "Password" with an eye icon. Below the fields are links for "HomeKit" and "Having trouble?". A "Log in" button is positioned at the bottom.


2. Home Page

After logged in successfully, you'll see the home page as following:



Home page is divided to 3 main parts:

2. click circle icon on the top left to enter main settings menu;
3. "Favorite" on the top left to switch between different rooms and groups;
4. device display and control area(the blank area in the picture) you can monitor and operate every smart device you have connected with.

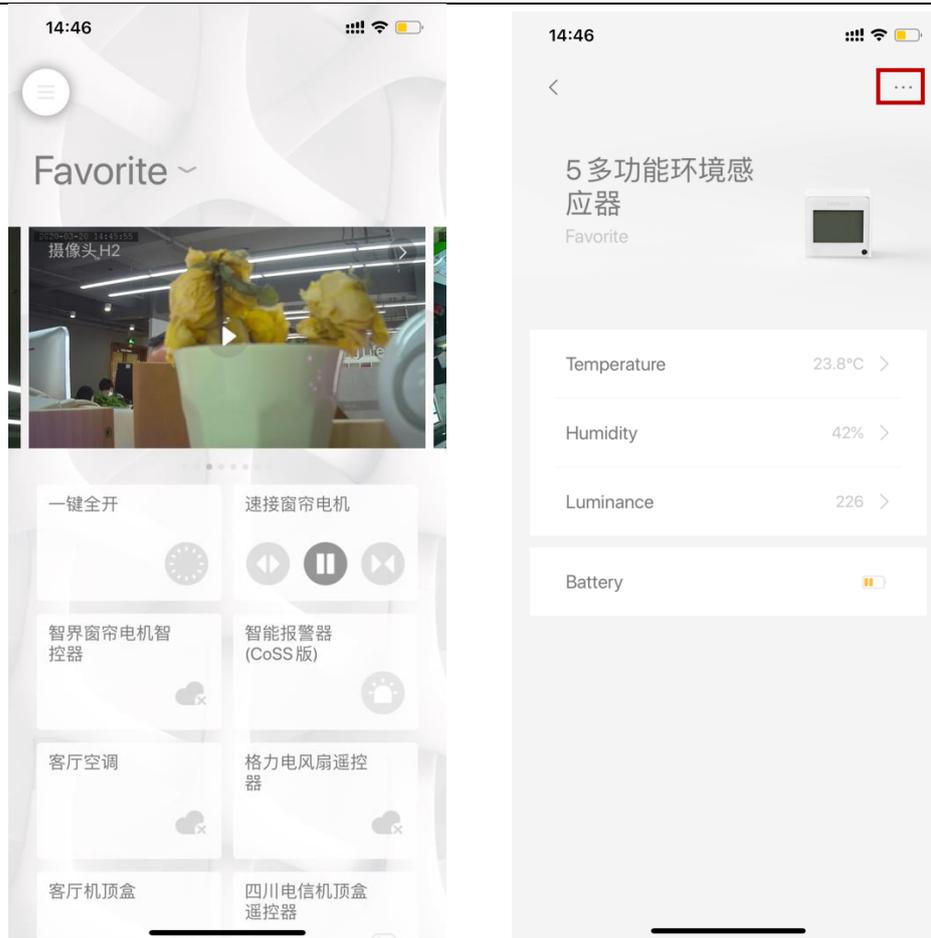

There are 2 main features of this interface:

Status Display


If  icon is displayed, it indicates that the device is offline (including not powered on, disconnected with Smart Station). If other status occurs, there will be different icons or popped up messages to inform you with the actual statuses of the device.

Device Operation

- Click the switch button of each device to turn it on/off. Grey indicates the device is off, white indicates the device is on;
- Click the blank space on device's section to enter a subpage where you can check its status, make other commands than turn on/off (eg. air conditioner) and edit specific functions including color of the light, target temperature or mode. Click “...” on the top right to rename, group your device and assign it to any Smart, scenes or triggers.

3. Main Settings Menu


Click circle icon on the top left on the home page to enter main settings menu:

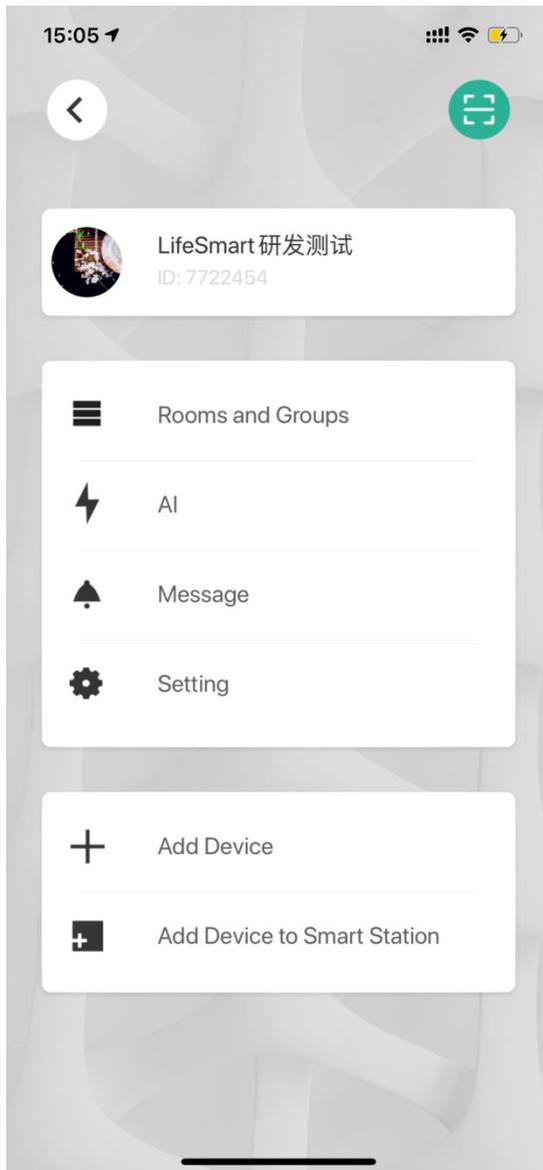

You can edit your account information, switch to another account, set and manage intelligence, check, manage all your smart devices here etc., also add device is completed here. This menu is consisted of Account Management, Rooms and Groups, AI, Message, Setting and Add device.

3.1 Account Management


Click the first bar on the top of main settings menu, which leads to Account Management. You can check and edit your account info here:

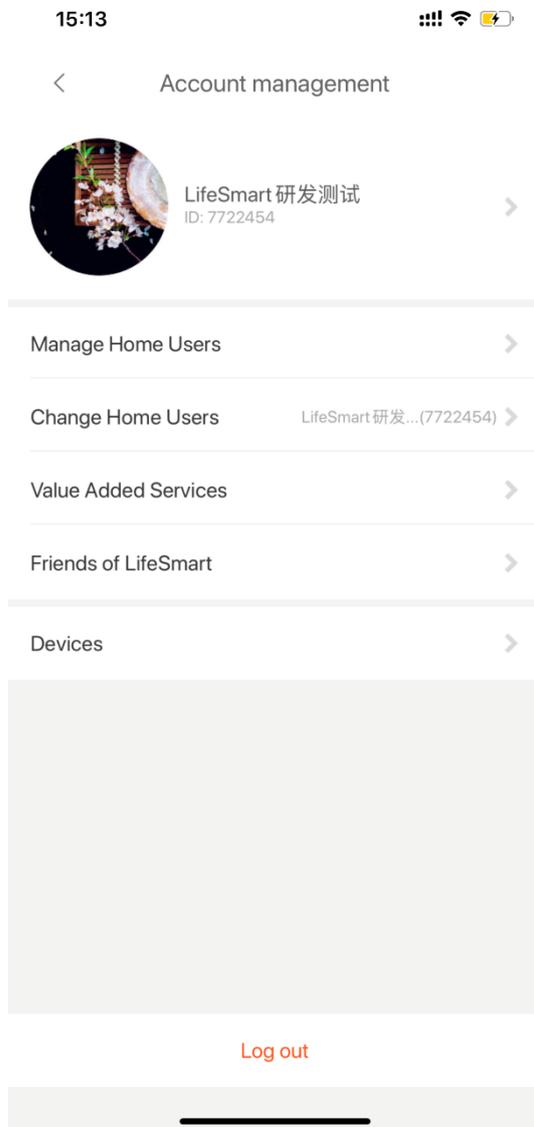

Account Management module has 6 sections including Personal Information, Manage Home Users, Change Home Users, Value Added Services, Friends of LifeSmart and Devices Management.


3.1.1 Personal Information

Click  to enter Personal Information centre.
Here you can easily edit your personal information including your avatar, nickname, email address and password. Your LifeSmart ID and your region can be viewed here as well.

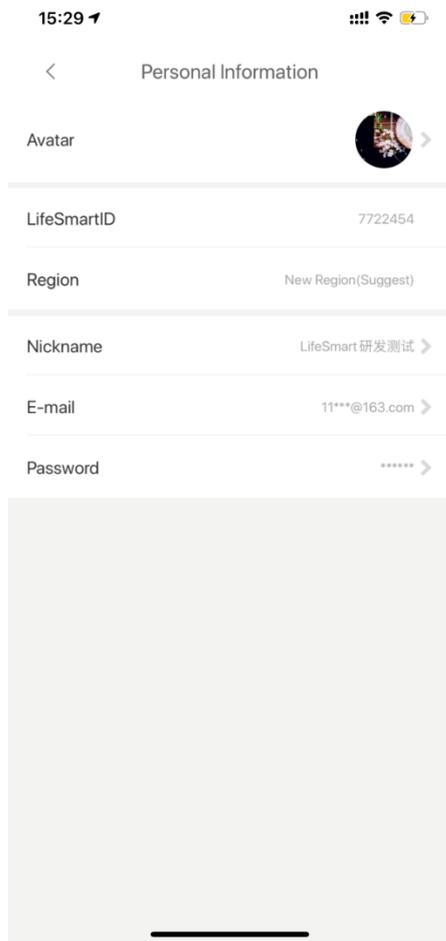


How to change your account password:

1) Click 'Password' and enter your current password.

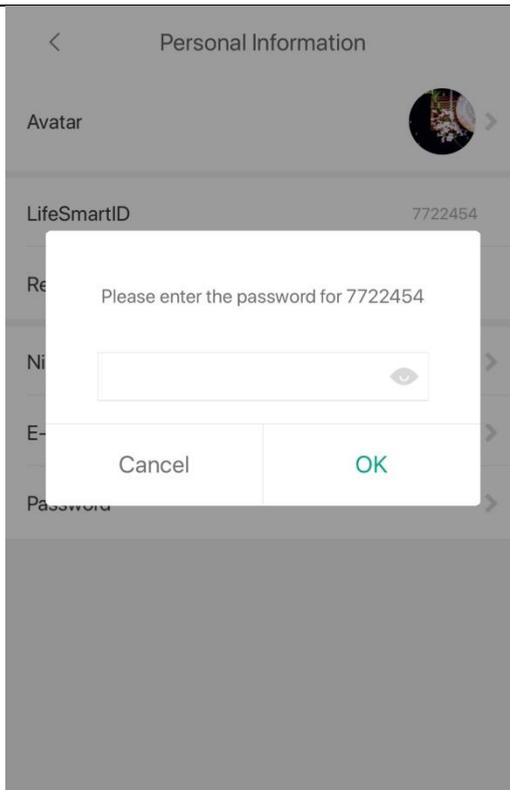


2) Enter your new password and then click OK:

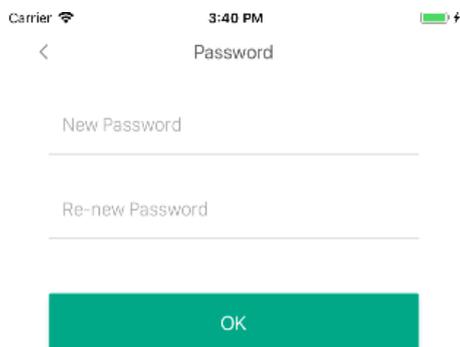


3) There will be a 'Password Changed Successful' notice when it's completed.


How to reset Password:

1) When you forget your password while logging in, click 'Having trouble?'

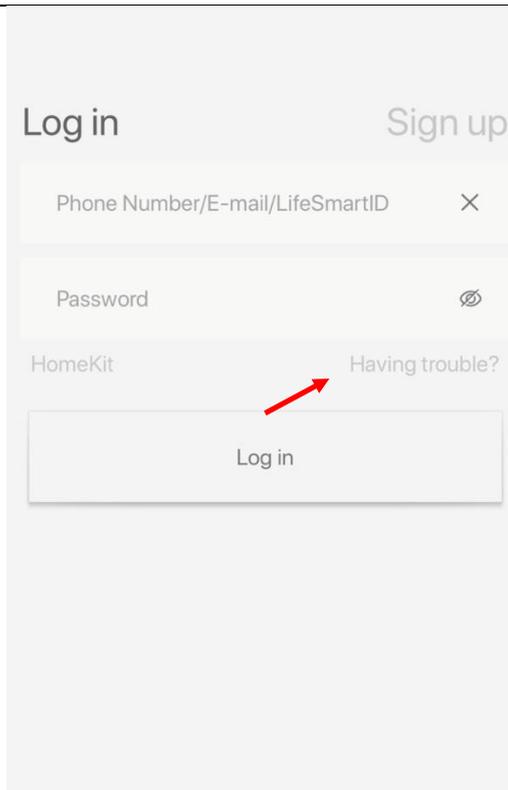


- 2) Click 'Forgot Password' and enter your email address (which you used to sign up), click check. A security link will then be sent to your email provided.

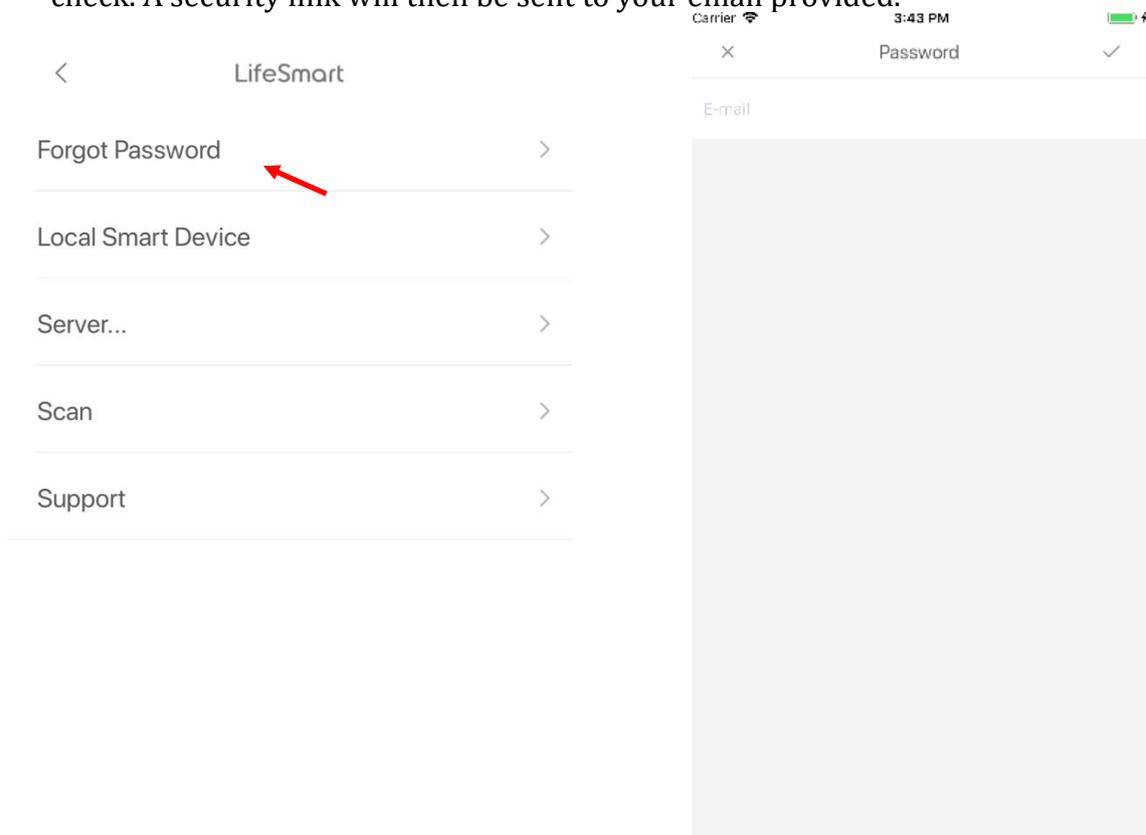

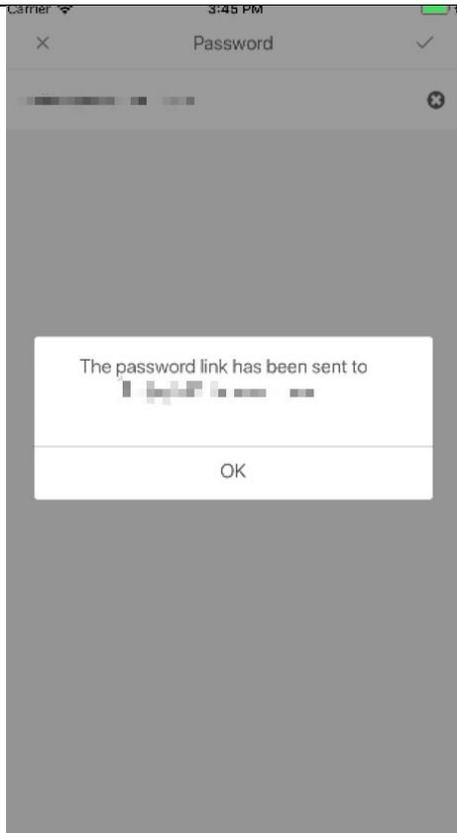

3) Then login to your email box and check the password reset email:

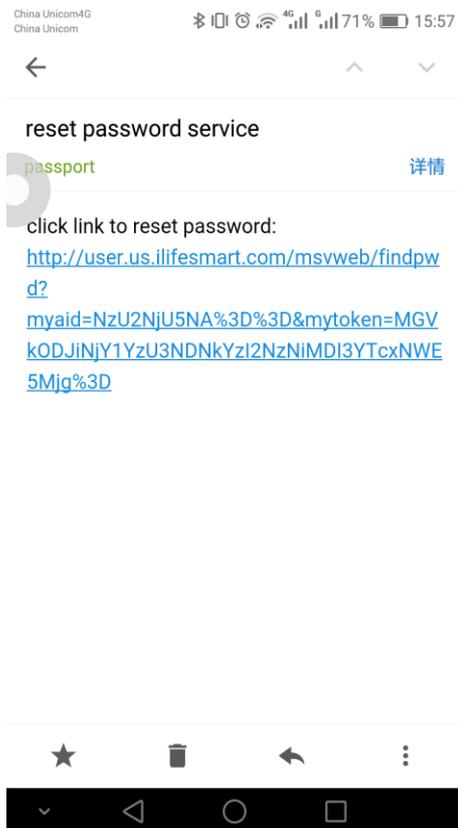

4) Click the link to reset your password.

LifeSmart

new password

reenter new password

Confirm

5) Enter your new password here, then click 'Confirm'


LifeSmart

Password was changed, please use new-password from now on.



3.1.2 Manage Home Users



This feature allows you to add your family members to gain access to your Smart Station:

- 1) Ask your family member(s) to download LifeSmart App first and sign up. Please copy their LifeSmart IDs (ID will be shown in their Account Management section, eg: '7768537' in the picture below)

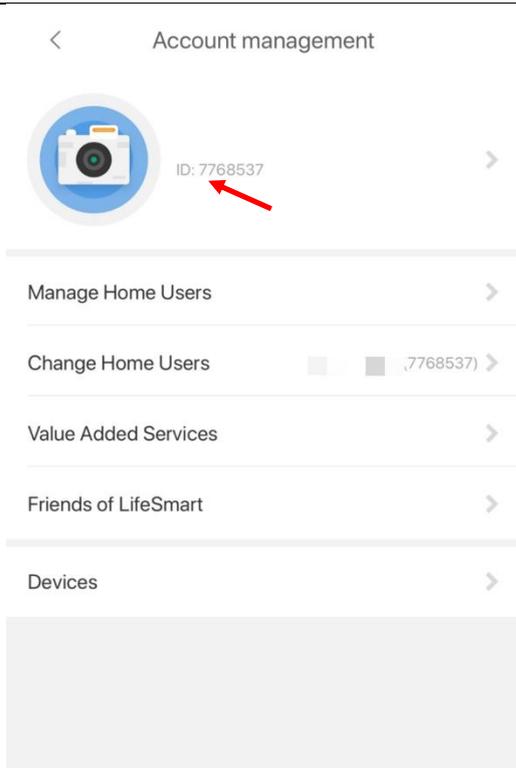

- 2) Make sure you're logged in your Priory Account. (eg. Priory Account ID:7722454)
- 3) Click 'Manage Home Users' - 'Next', click the '+' sign on the top right, input the ID(s) of your family member(s), click 'OK'. If you want to delete this member, click edit button to delete.

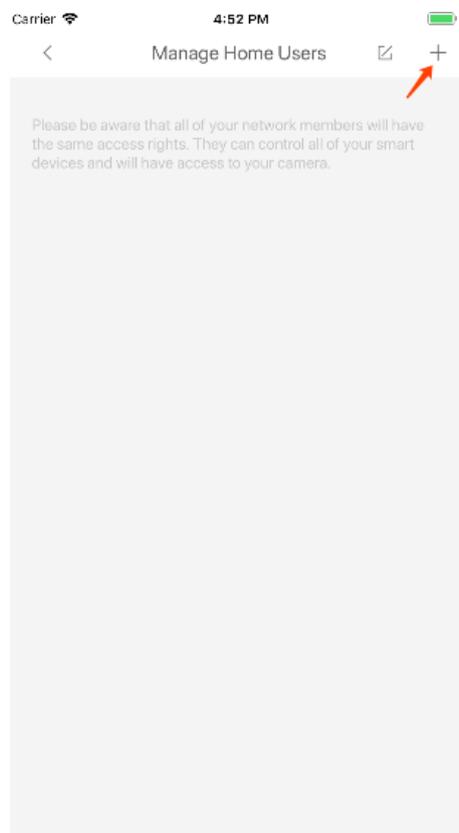
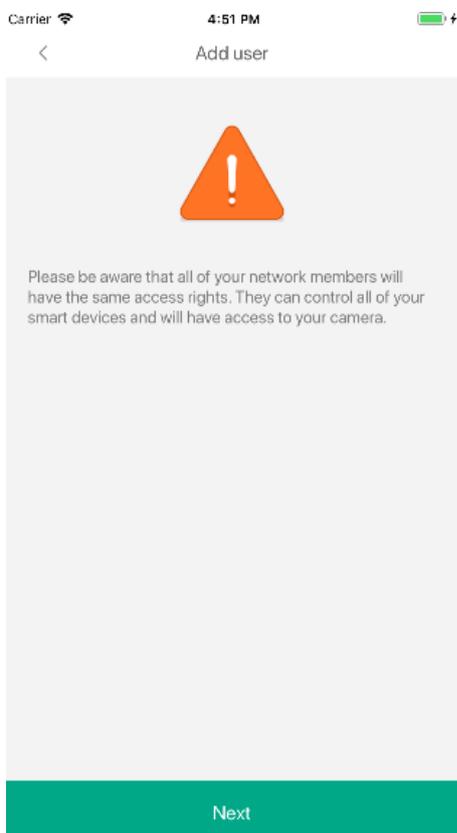


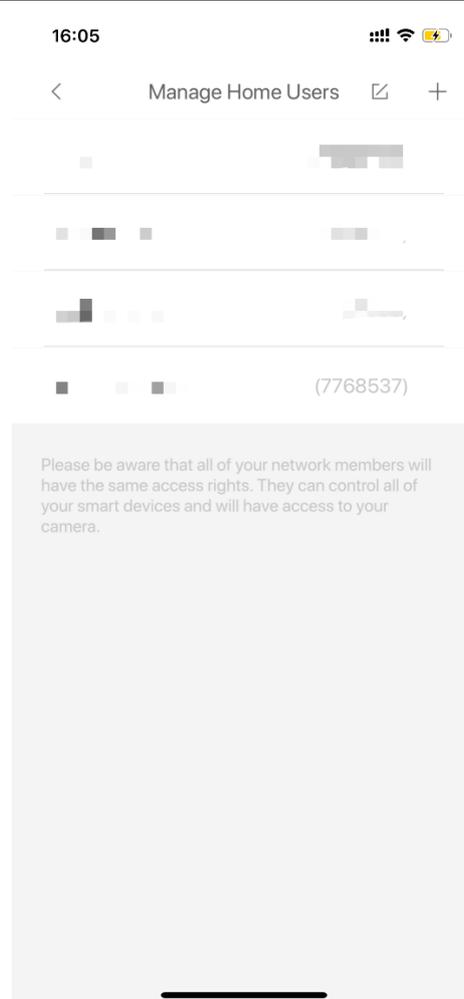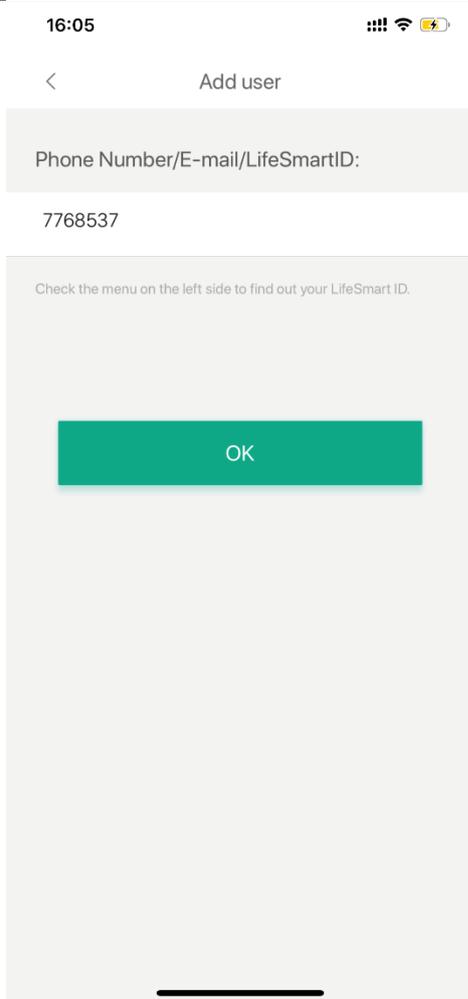


3.1.3 Change Home Users

You can switch to another account to manage devices in different locations.

For example, login 7722454 priory account, you can see family member account 7722446. This 7722446 account can manage all devices under 7722454. Enter Change Home Users to log in to different accounts.

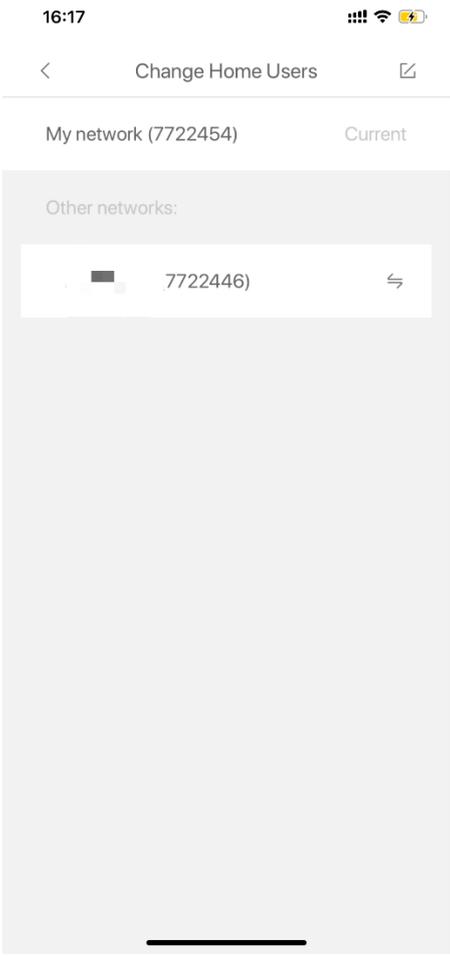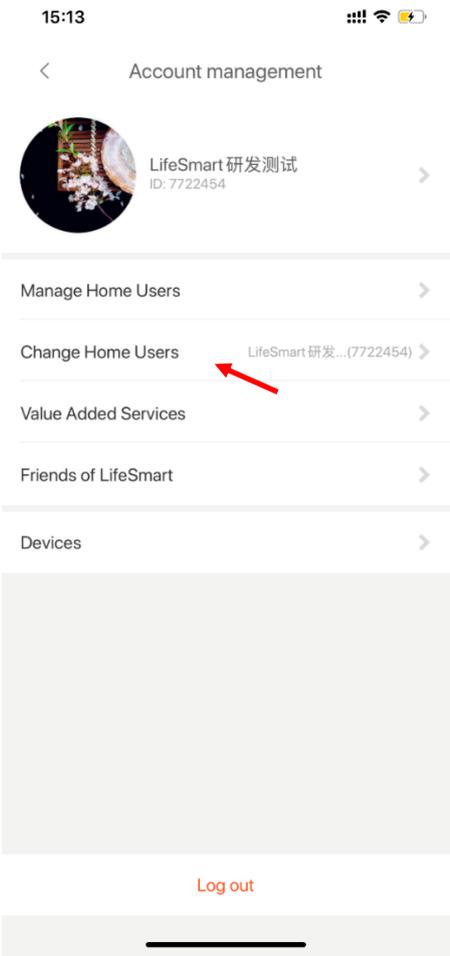

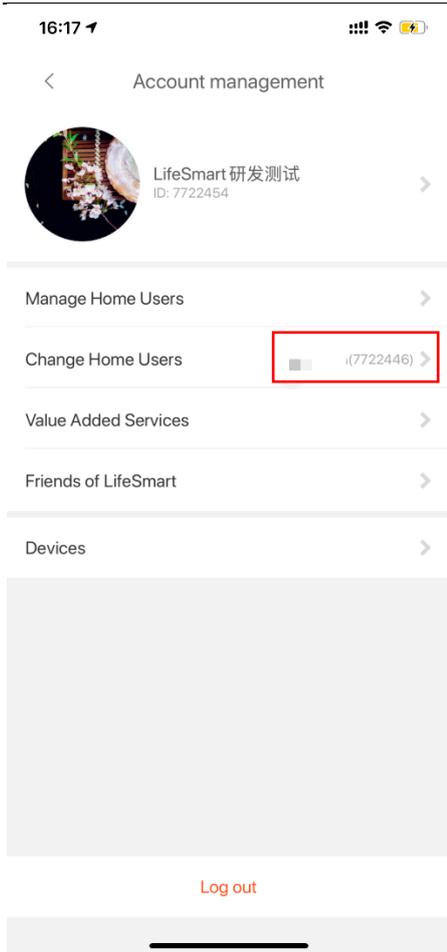

3.1.4 Value Added Services

VIP service. You are welcomed to try new features we provide here. (Your VIP membership has to be activated before you use this service, contact our support team to get more information about it.)

3.1.5 Friends of LifeSmart

Partners that work with LifeSmart, currently we listed Eliq here:



Friends of LifeSmart

Learn more about your energy usage, add smart energy surveillance and get hands on tips and tricks on how to lower your energy usage.

elia



3.1.6 Devices Management


You can check the records of all mobile devices which have been registered with your account.

Current device		
蒋小青的 iPhone First logon time: 03/20 16:16:33		
Other device		
“longpp”的硬又黑 First logon time: 03/20 15:38:50 !		
test iphone6 First logon time: 03/20 15:21:17 !		
ASUS_Z01QD First logon time: 03/20 14:24:47 !		
“longpp”的硬又黑 First logon time: 03/20 14:23:24 !		
PE-TL10 First logon time: 03/20 14:04:24		
Redmi Note 7 First logon time: 03/20 11:22:02		
“Mac”的 iPhone First logon time: 03/19 18:11:58		
pulley 的 iPhone First logon time: 03/19 16:48:31 !		




3.2 Rooms and Groups

You can create, edit a room and sort all devices that are added into this room, and you can also have it on your home page.


- 1) Click Rooms and Groups to enter a subpage:
- 2) Click Group Management to add a new group or edit the existing groups:

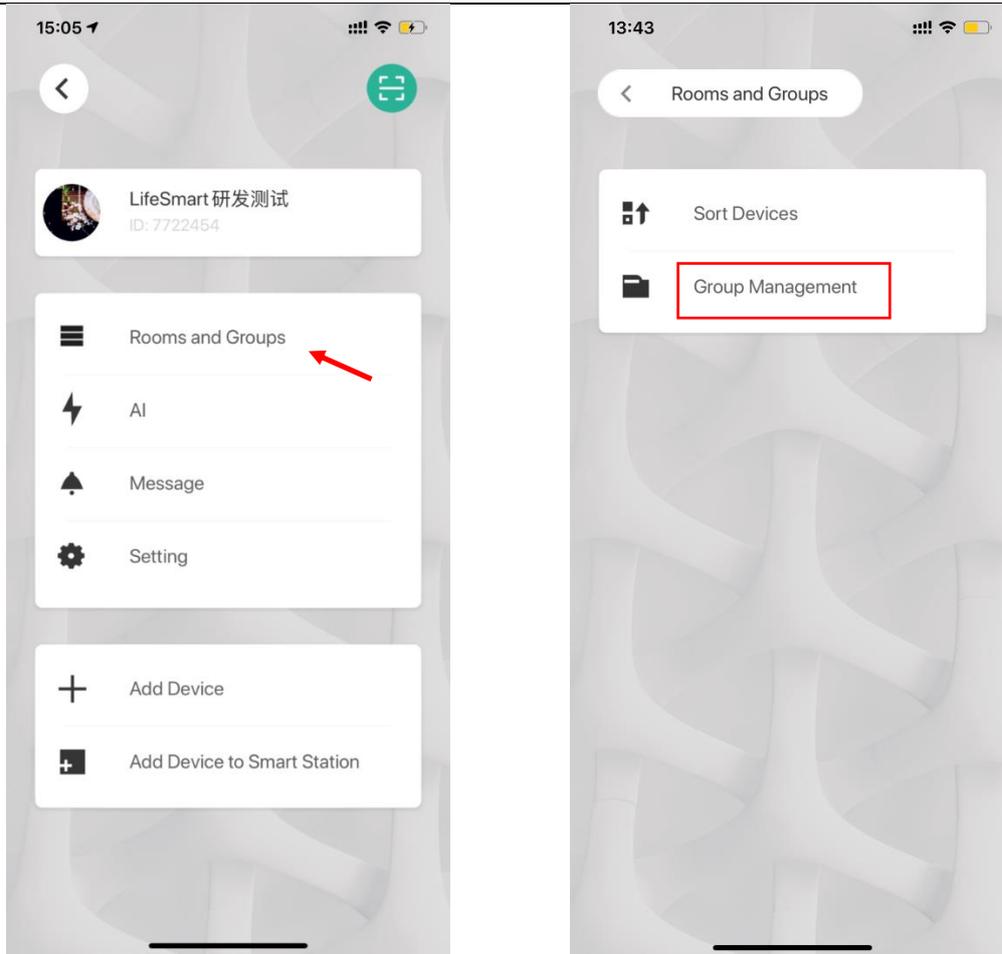

- 3) Click “+”to add a room or group, click  to sort or delete a room or group. The rooms/groups will be displayed on home page. (Rooms/groups with no devices will not be shown)

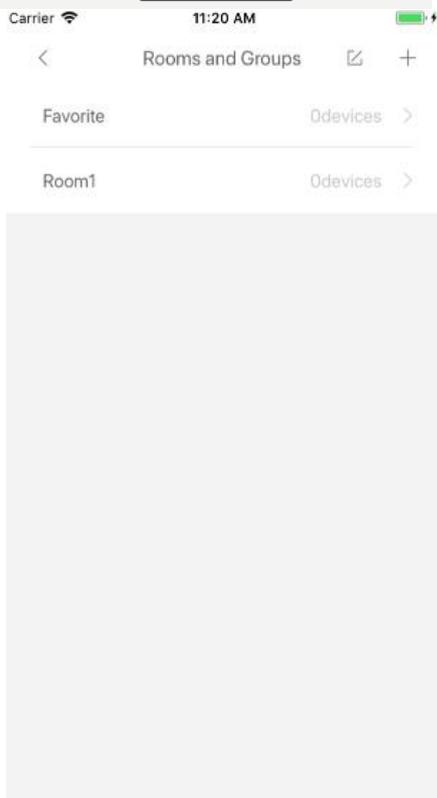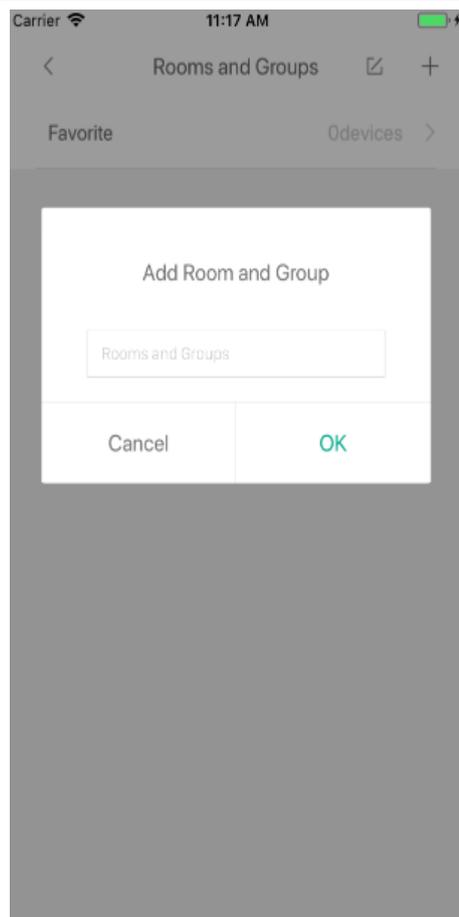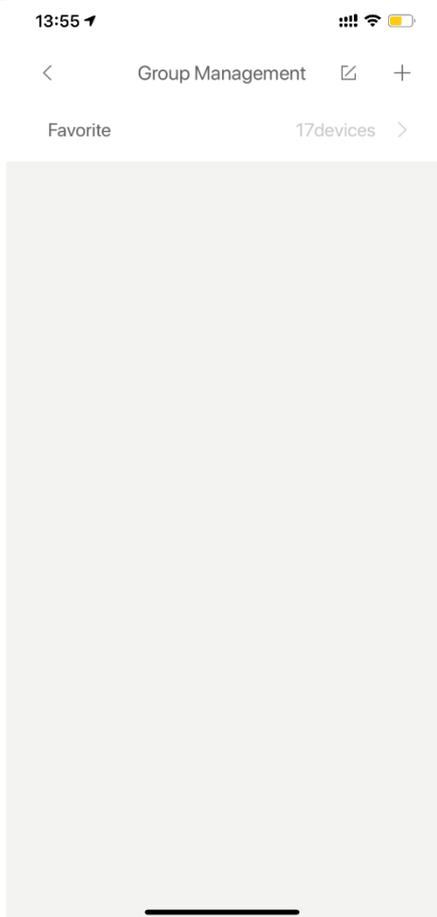



4) Enter a room/group, select devices you want to add in, click ✓ to confirm.

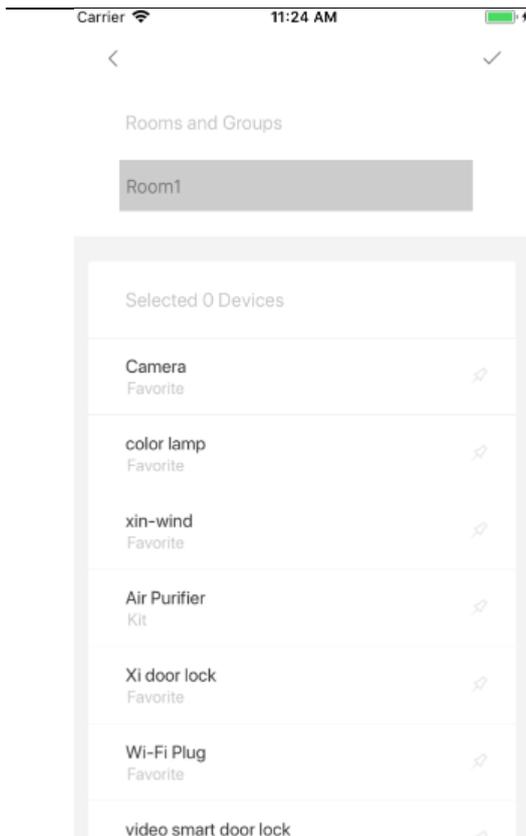

3.3 AI

When your smart devices are successfully functioning, you can then create new smart, scenes, schedules and new triggers to let your home work more intelligently.

There are 2 main parts when you enter AI page for the first time, one for Smart and another for Scene. Click “+” on top right to create a new AI.

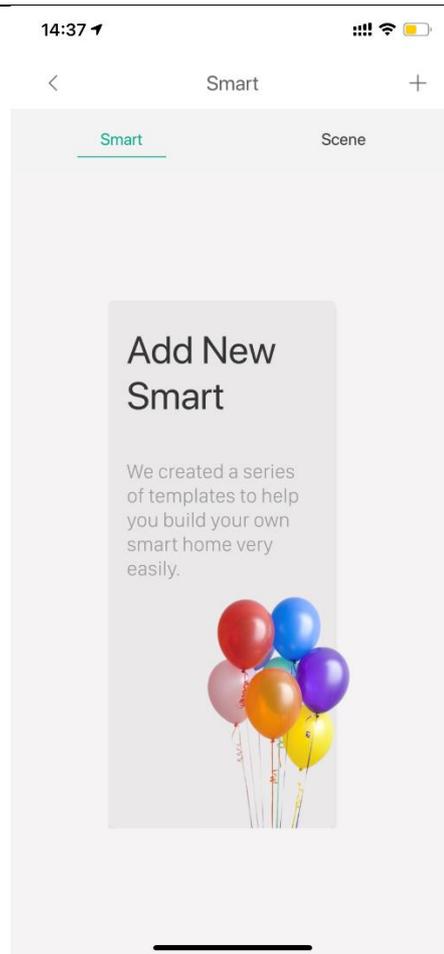
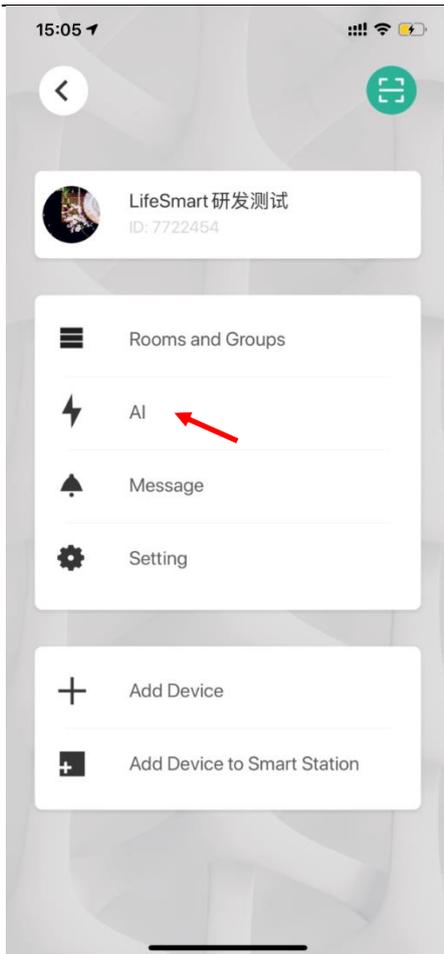


3.3.1 Smart


Smart is normally a whole AI that includes triggers, trigger source devices and trigger conditions.

To use smart function,

- 1) Click “+” or “Add new smart” picture to start creating a new smart.

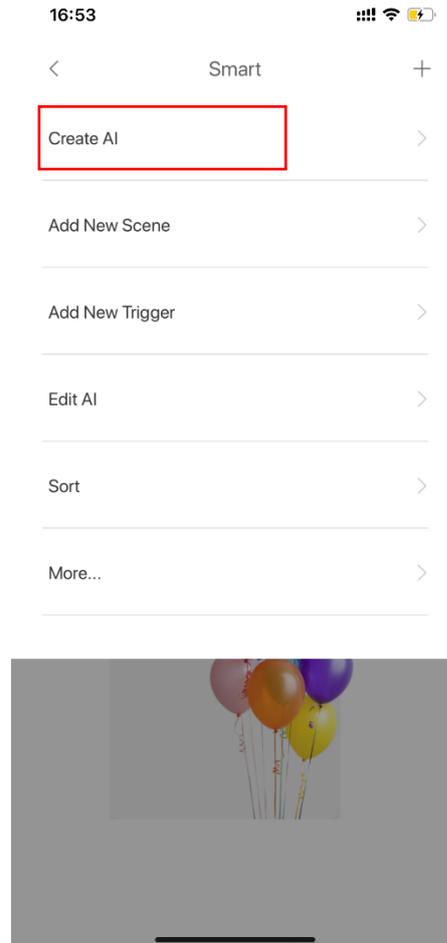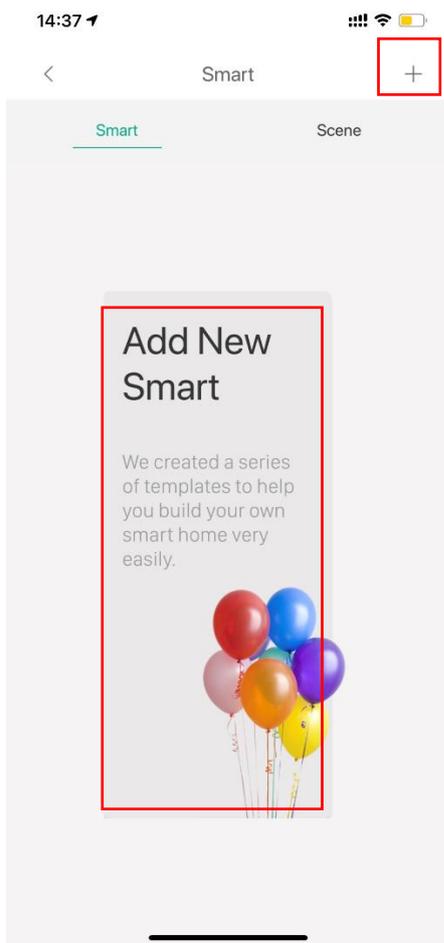

- 2) Select a Smart Station and start to create Smart, this is a must as intelligence functions are processed in smart station. If there is only one smart station then the app will guide you to the AI template page:

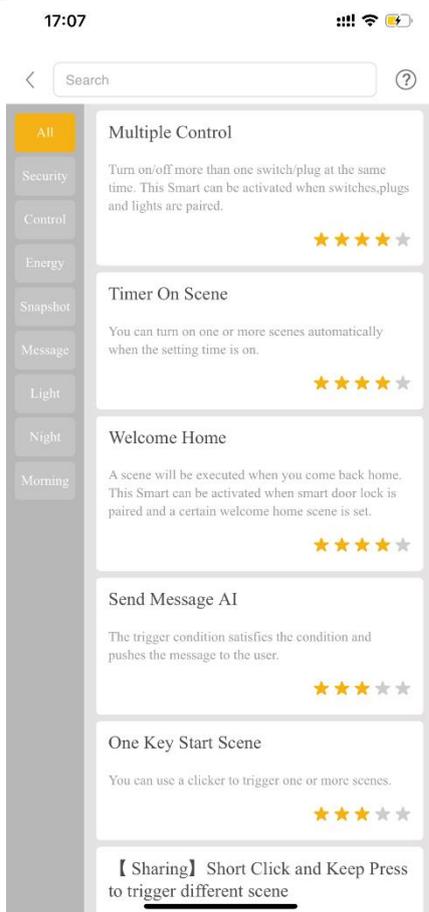

Take Motion Snapshot as an example:



Motion Snapshot

Function: If abnormal movement is detected at home/office, a series of snapshots will be taken and notifications will be sent to user's phone.


Devices required: Door/Window Sensor, Motion Sensor, Smart Door lock(not necessary), Camera

Configure Steps:

- Select "Motion Snapshot" template in "Security" tab, click to enter and "start to config" .
- Finish all the settings and name your smart, such as motion sensor, camera, time period of absence, number of snapshots and the message you are going to receive etc.

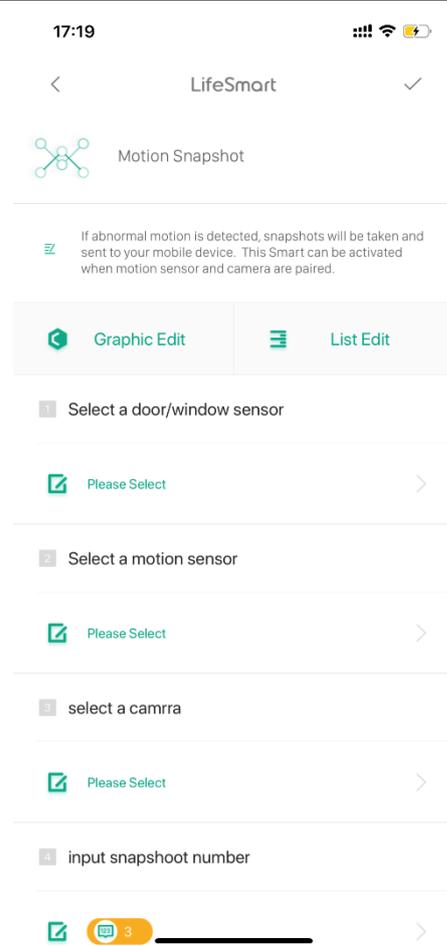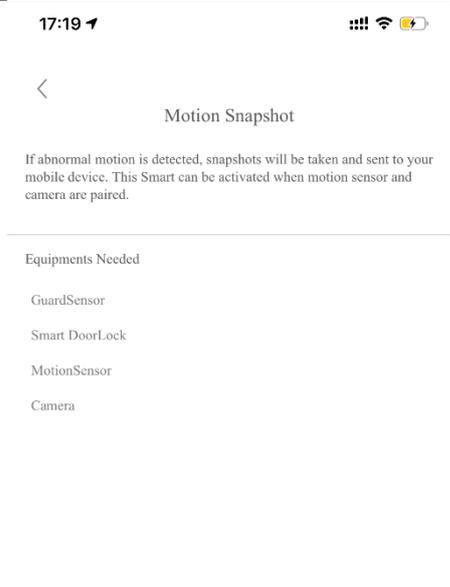

- c. After configuring all these settings, go back to Smart page and now you can check the Motion Snapshot here. If there's Smart with Virtual Key, it will be shown o home page too.

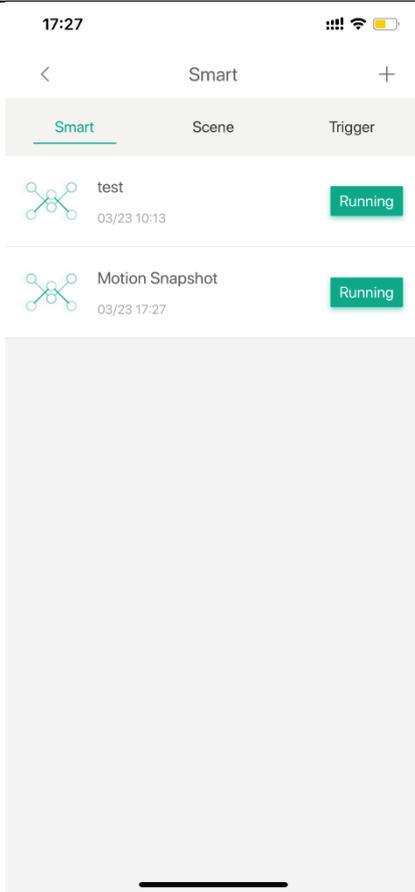


3.3.2 Scene



Scene is a category of AI which can include a lot of devices and can be triggered when specific conditions are met. For example control all lights with one click with your favourite colors. You can also trigger this scene by adding it into a Smart. We provide some templates in the library for you to choose from, you can always adjust them the way you like.

To use this function:


- 1) Click “+” or “Add new Scene” picture to start creating a new scene.

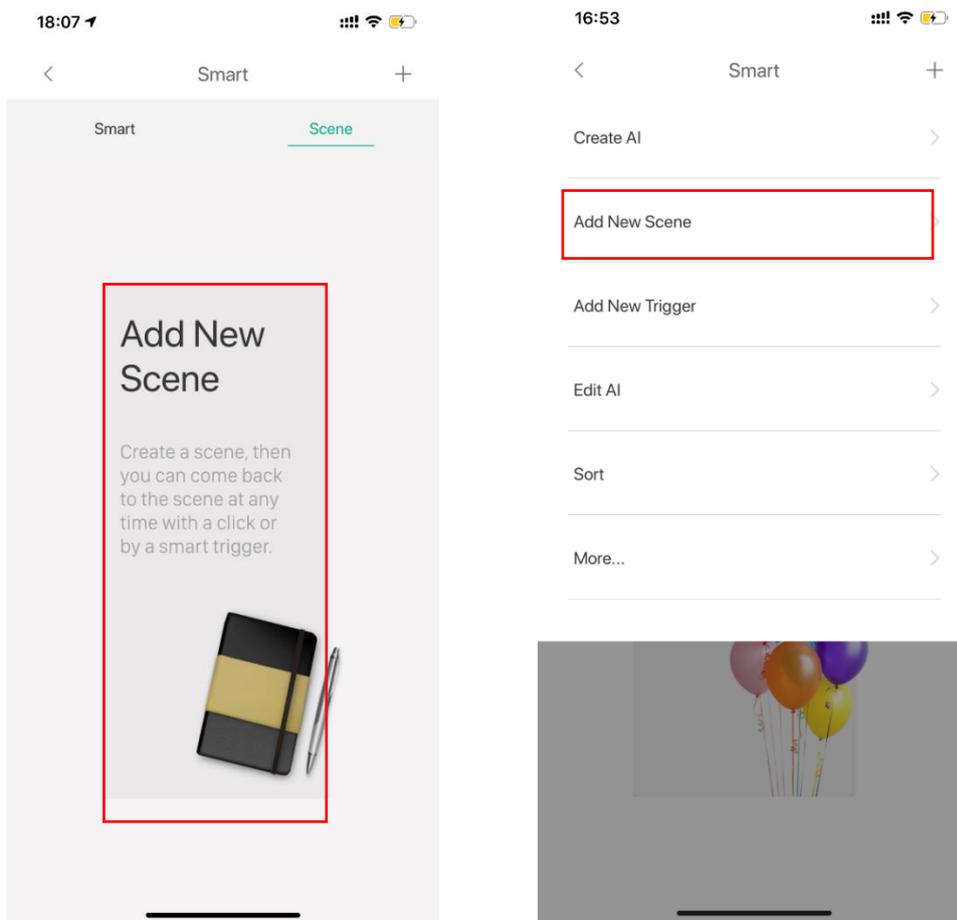

2) Click "Scene" to get into customization scene configuration page and select a smart station:

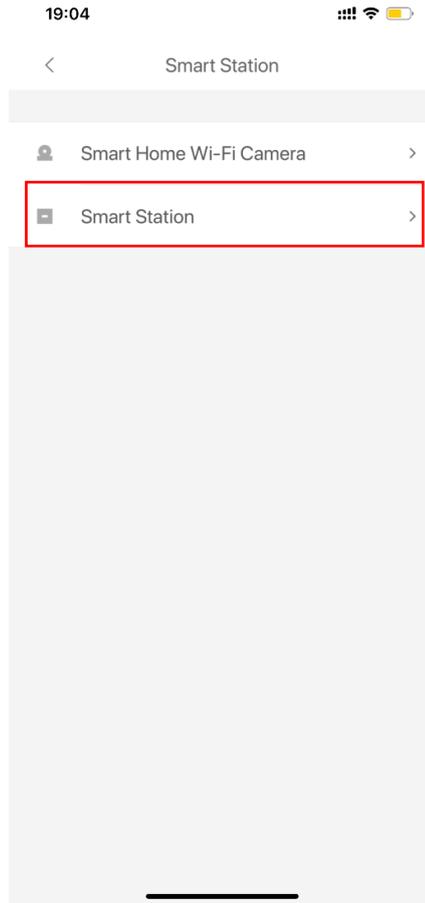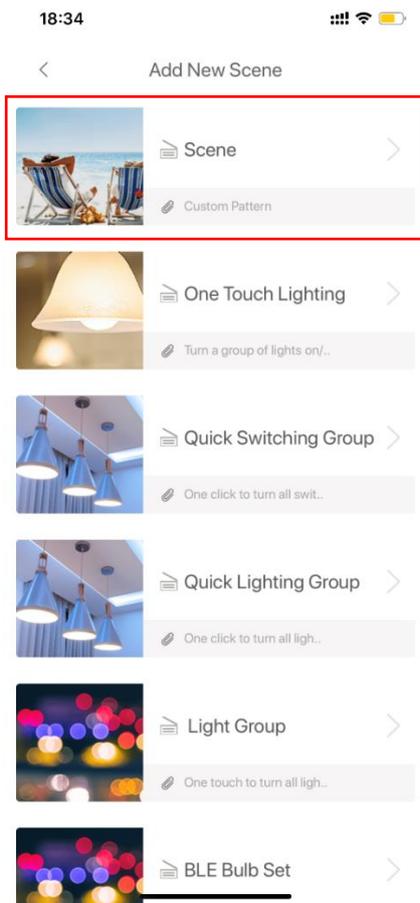


3) Tick the devices and select the status of them that you want to include in the scene, and click “>” on top right to next step:

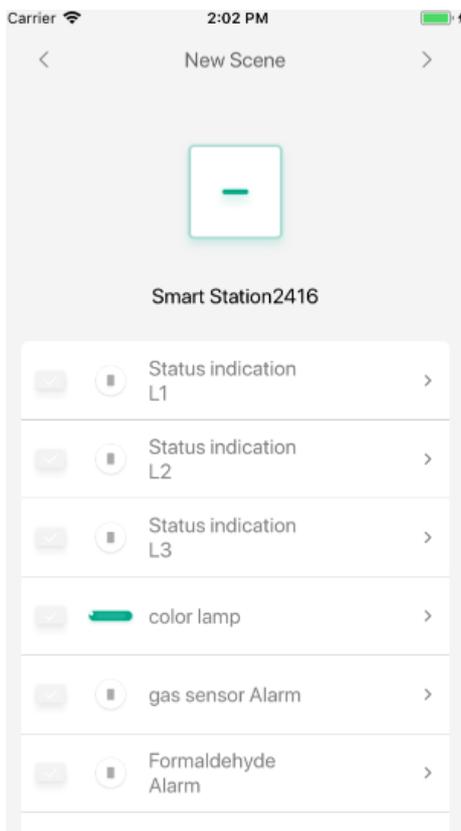


4) Set the name of the scene and execution order of the scene, there are 3 order modes: Fast, Stable and Merge Commands. You can set Fast mode alone, Stable mode alone, Fast+Stable, Fast+Merge Commands, Stable+Merge Commands and Fast+Stable+Merge Commands.

For these 3 modes:

- a. Fast mode will not care whether the commands are executed by the device, it just gives the command once;
- b. For Stable mode app will check whether the commands are actually conducted by devices, if a device fails to execute, commands will be sent again so it ensures one device to execute a command successfully;
- c. For merge mode, e.g. if you give commands to 2x 3-way switches, each Switch will work as an individual, so each 3 gangs will work together, they will not act one by one;

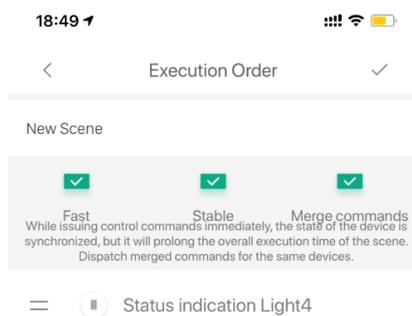



5) After configuration, the scene can be viewed on home page or AI->Scene.

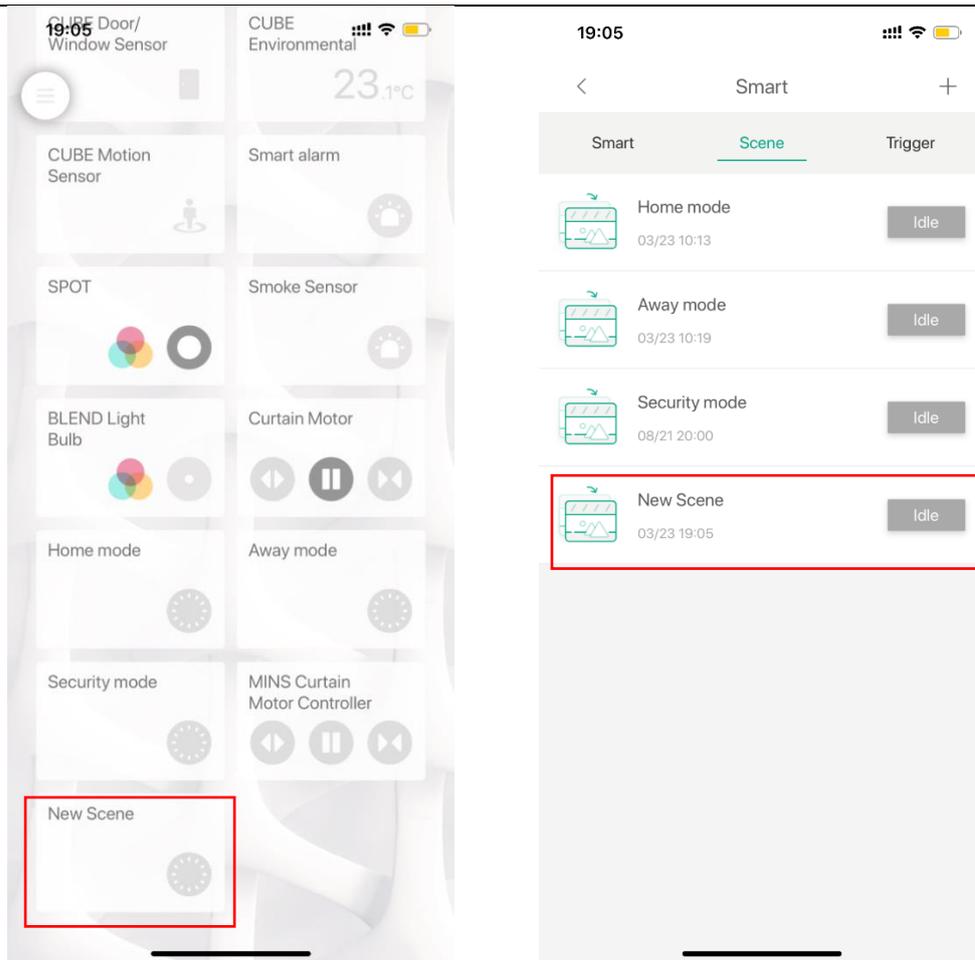



6) Besides creating the customized scenes, users can also use scene templates from the library, such as Quick Lighting Group, One Touch Lighting, BLE Bulb Set etc.

Here take Quick Lighting Group setting as an example:


- a. Click “+” or “Add new scene” picture to start creating a new scene.

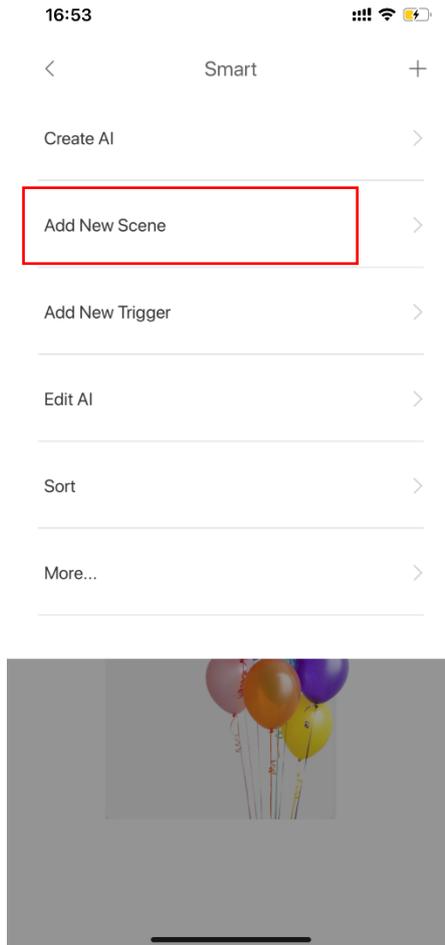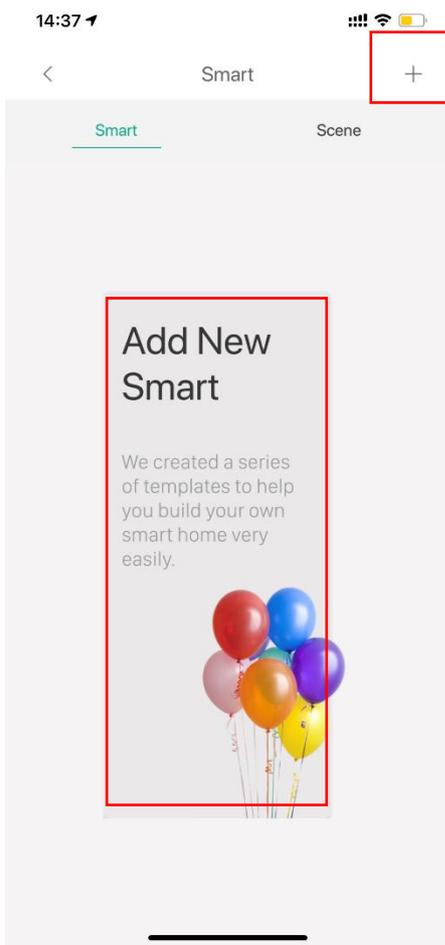


b. Select Quick Lighting Group and then select a smart station:

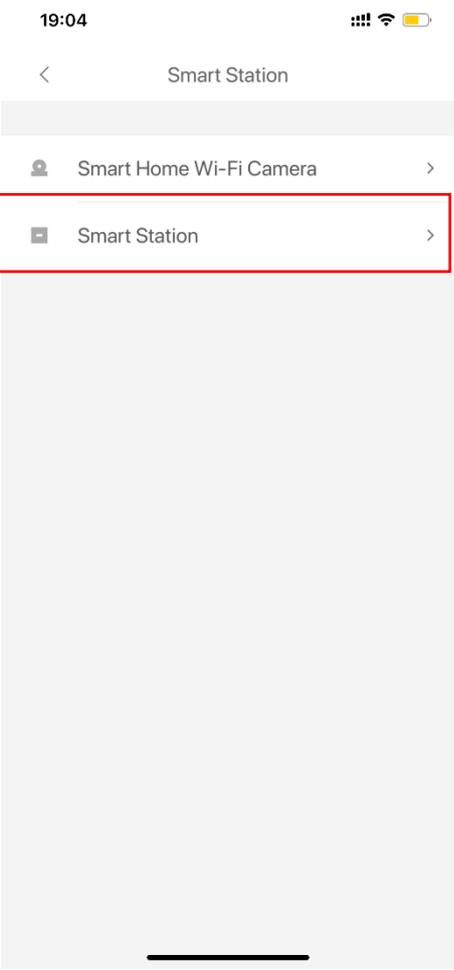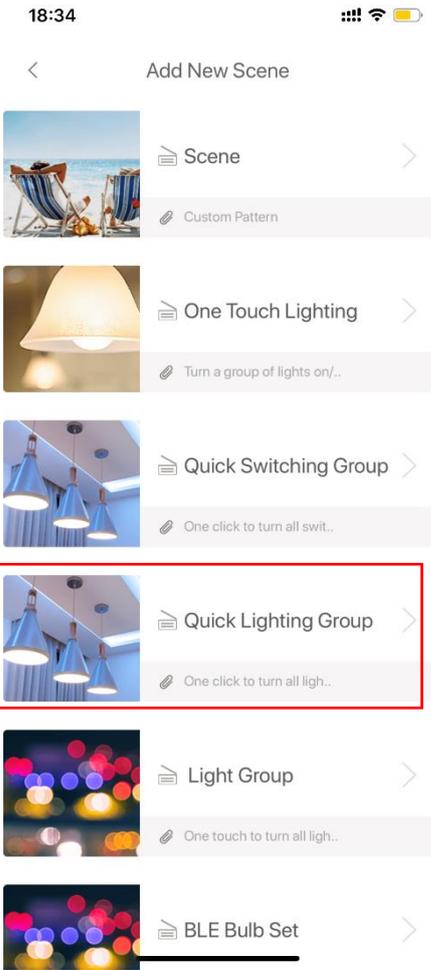


c. Click "Start" to configure.

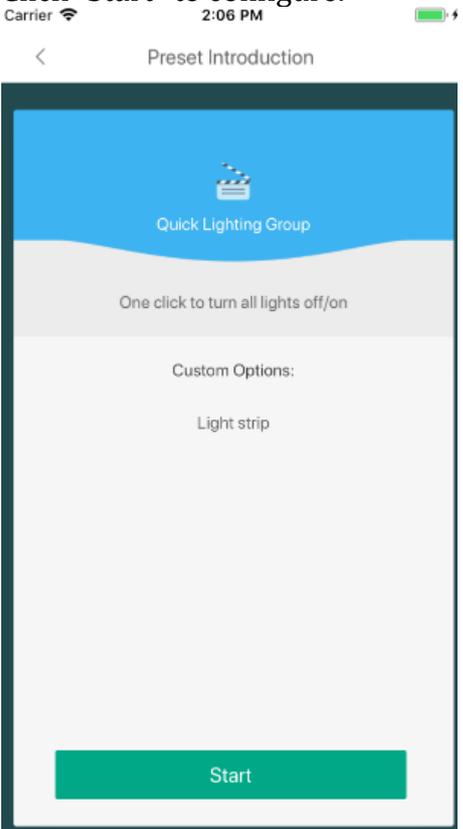

- d. Modify the name of the scene and select the lights that you want to include in the scene.

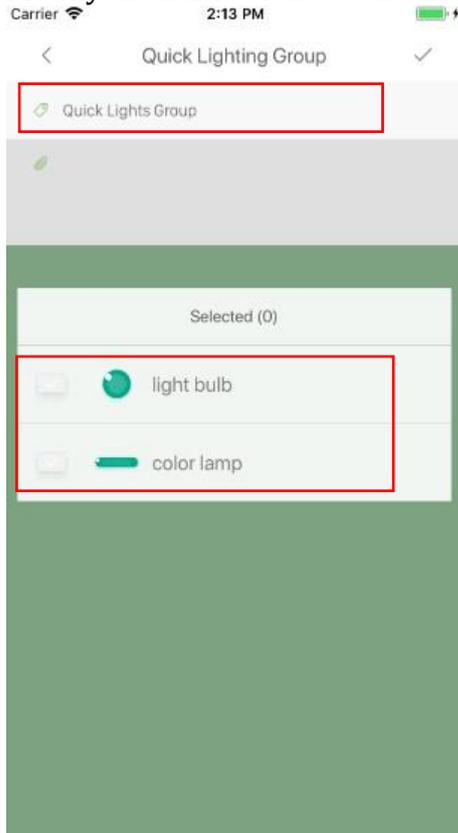

- e. After configuration you can check the scene in home page.

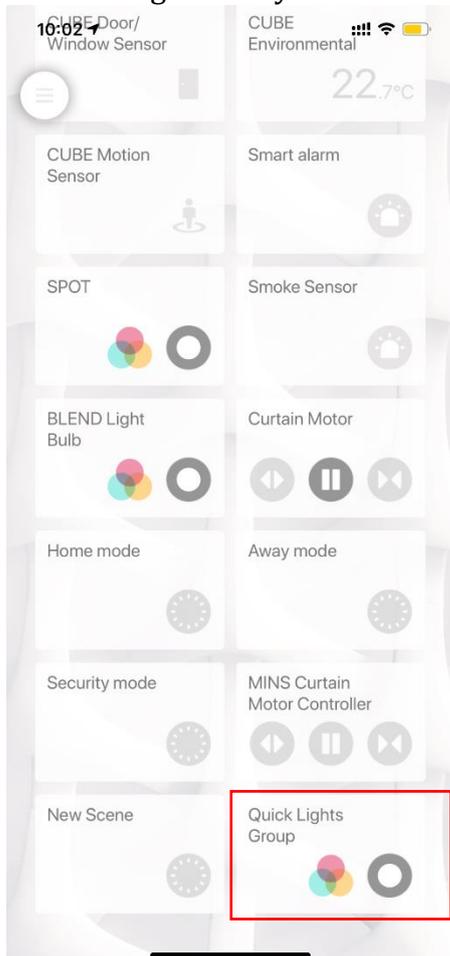


3.3.3 Schedule



Schedule is the working time period of a device, a scene or a smart.

Here we take time schedule settings of a device as an example:


1) Click BLEND Light Bulb in home page, then click “...” on top right corner.

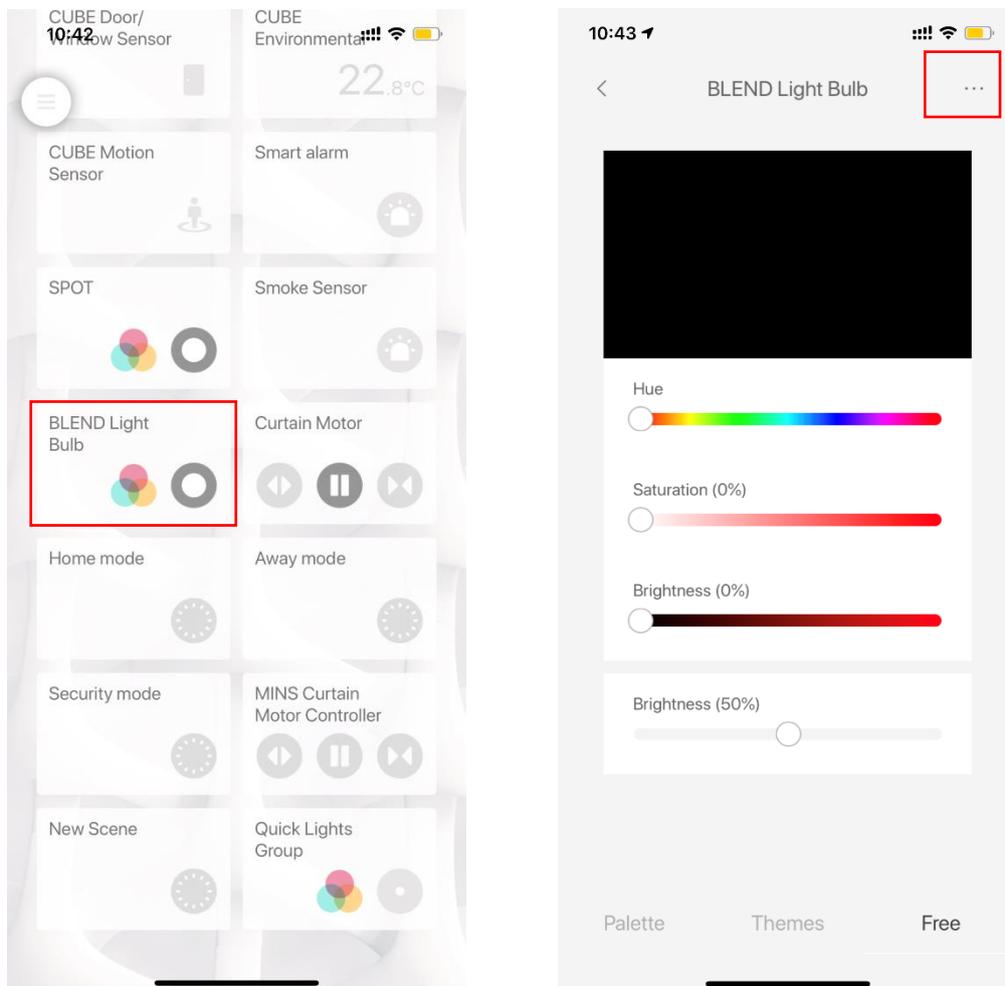


2) Click “Schedule”, in the next page click “+” to add a schedule, you can create a multiple of schedules.

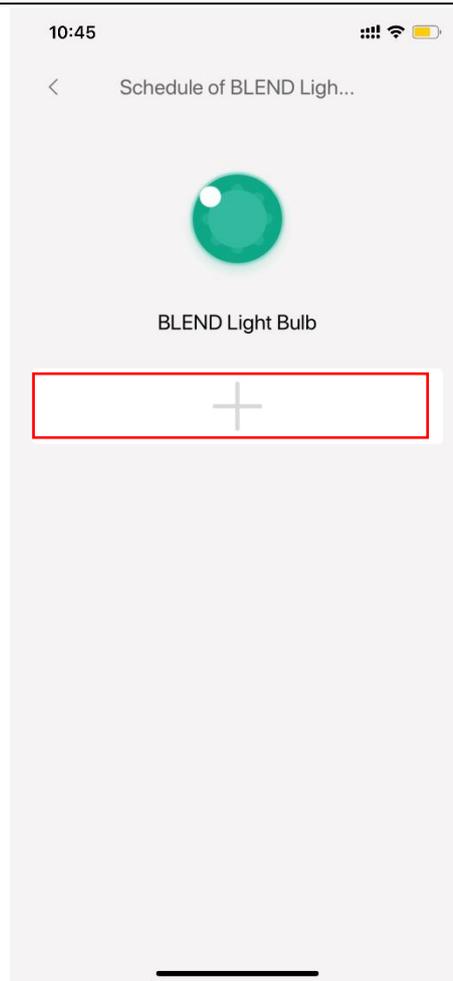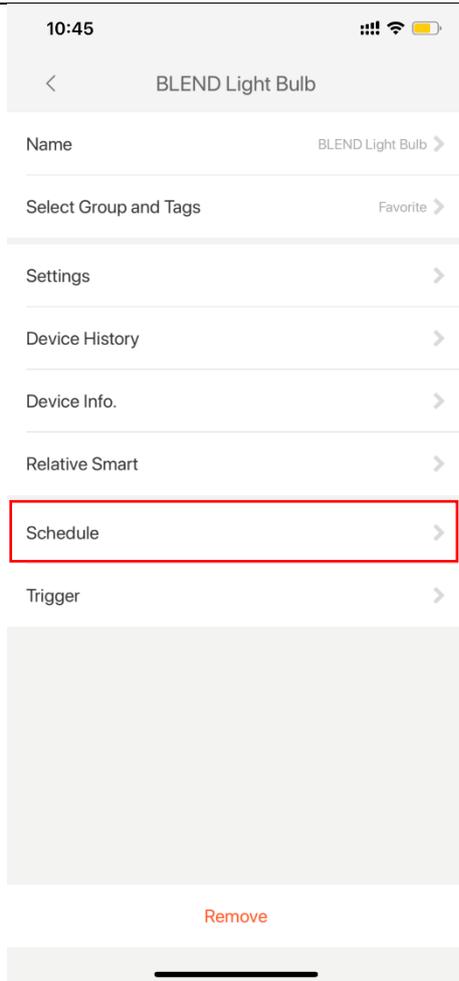

3) Set time, repeat way and action, then tick on the top right to confirm.

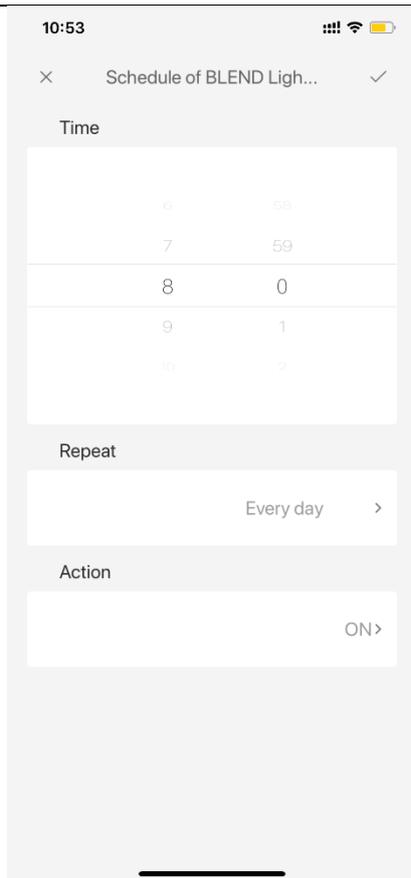

- 4) After configuration you can check the schedule in this device's schedule settings or in AI->Schedule.

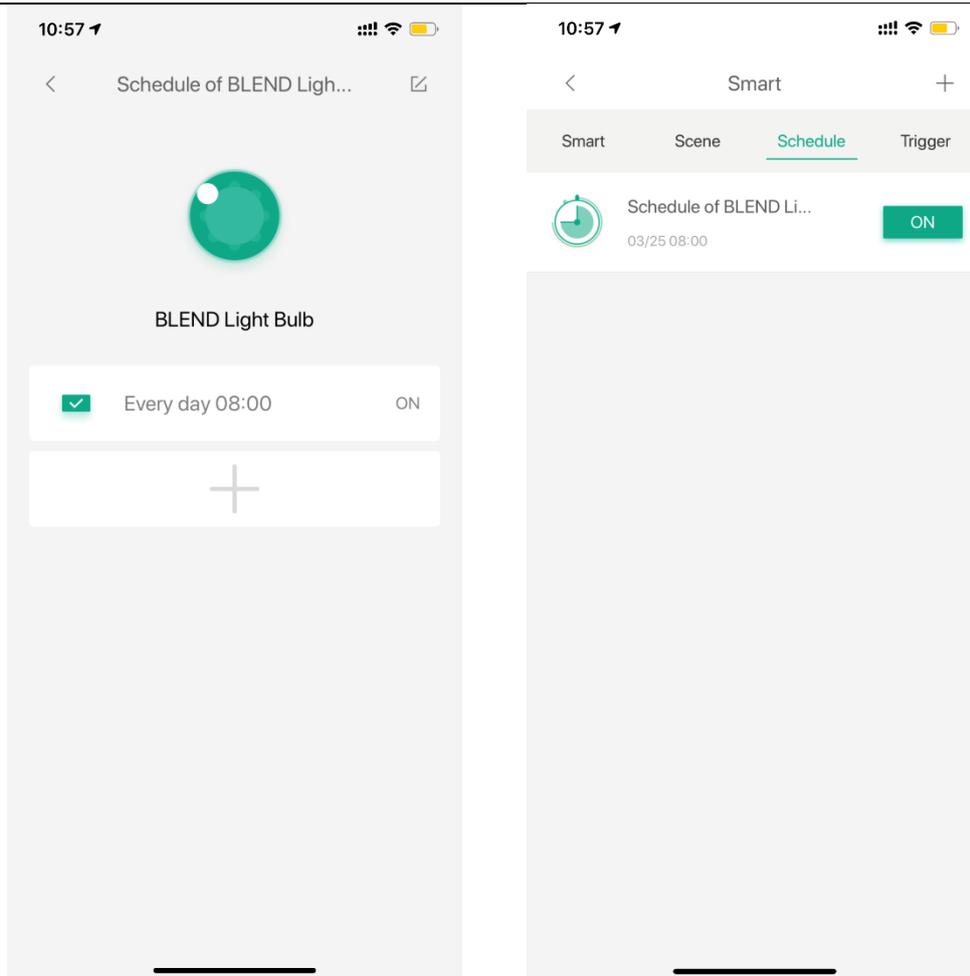

3.3.4 Trigger



Apart from “Add New Smart” and “Add New Scene”, we also provide another AI trigger which links the actions between 2 devices.

We provide 4 templates here including:

- 1) Door Open Snapshot: Take snapshots when a door is opened;
- 2) Motion Snapshot: take snapshots when motion is detected;
- 3) Save Energy on Your Water Heater: Automatically turn on/off your water heater to save energy;
- 4) Humidity: Automatically turn on a humidifier when the air is too dry.


3.3.5 Edit AI

Users can edit/delete Smart, Scene or Trigger here.

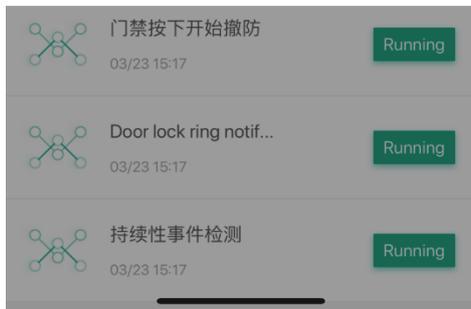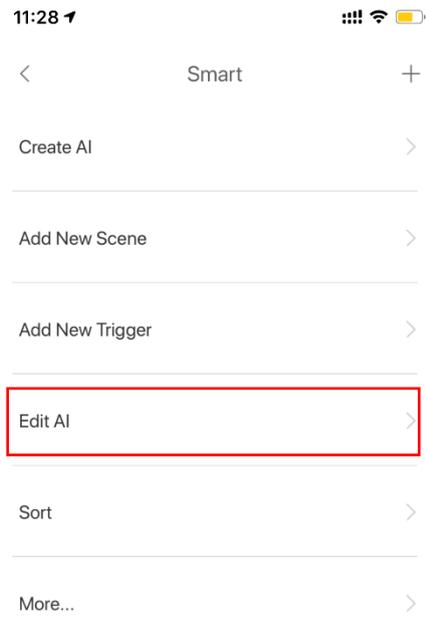


3.3.6 Sort

In this menu users can drag and re-arrange the order of the created AI.

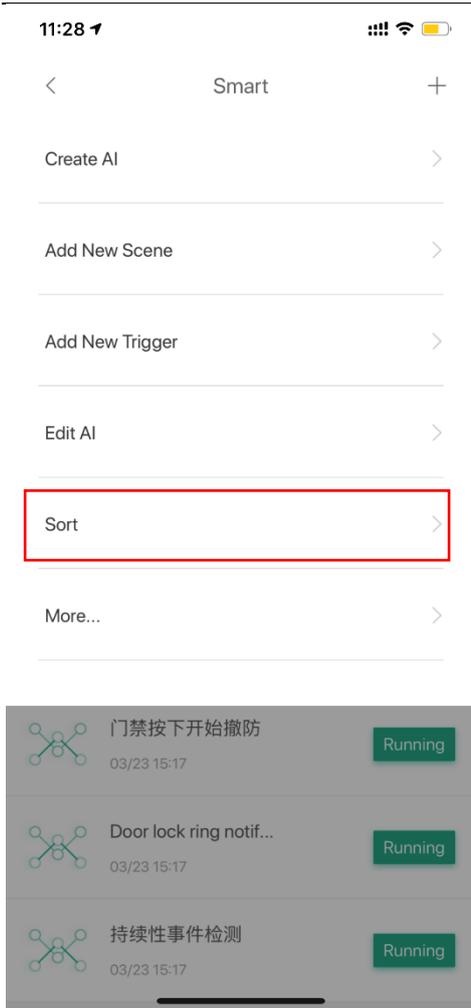


3.3.7 More

This is the option for some more advanced functions e.g. DIY AI, make AI templates etc. These functions are not included in the normal accounts, for more information about these functions please check with your local distributor.

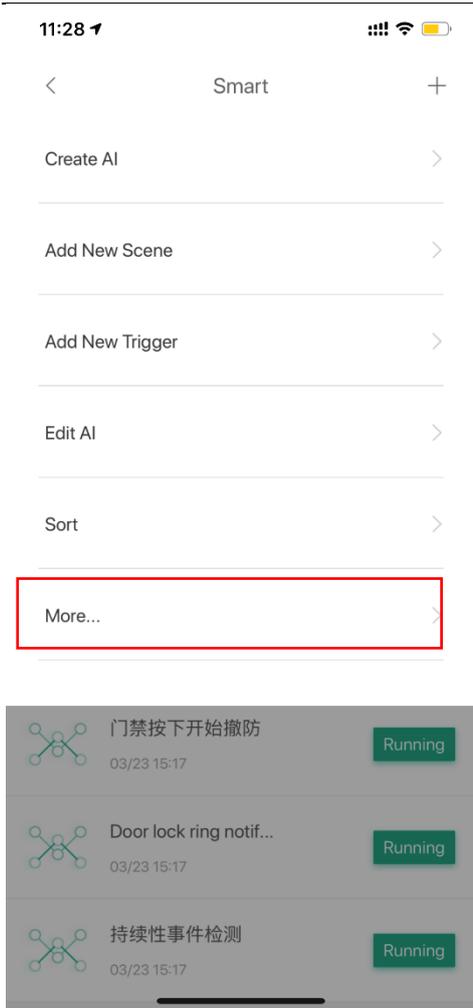



3.4 Message

This is the menu where users can check details when push notifications are sent to the mobile phone, such as snapshots, messages and other alerts.

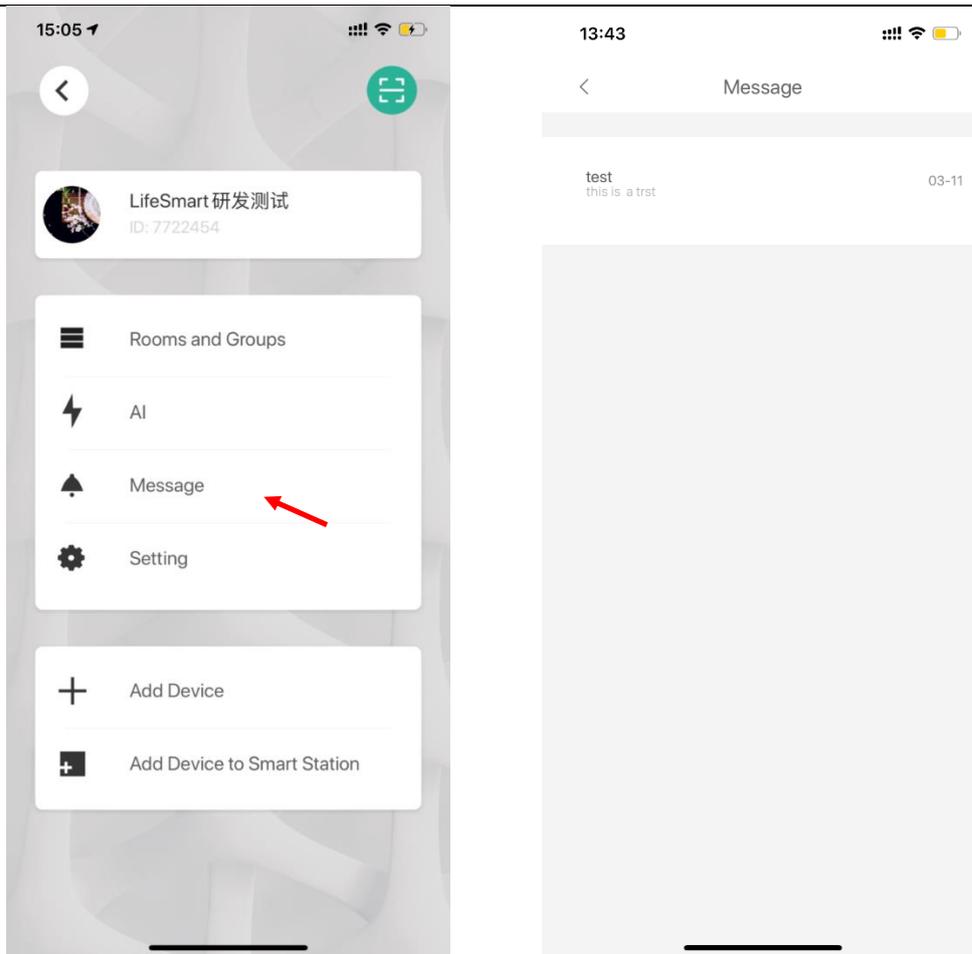



3.5 Settings

It includes All Devices, Share, Local Smart Device, Advanced Settings, Device Instructions and About.

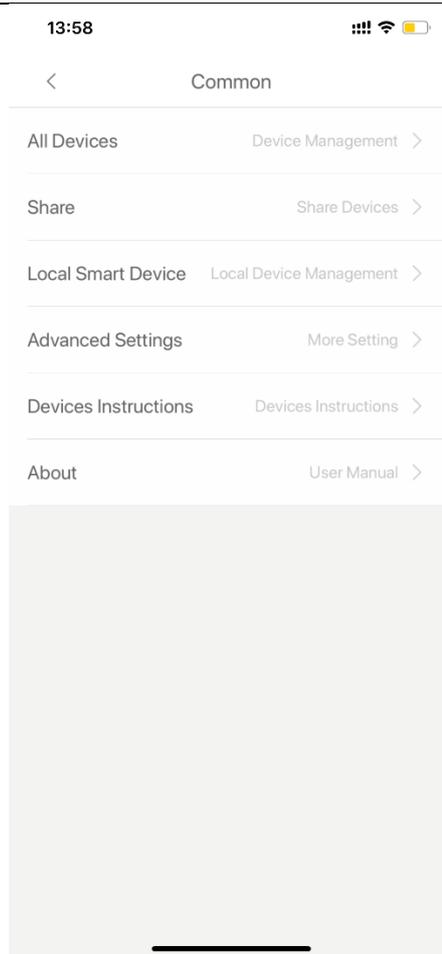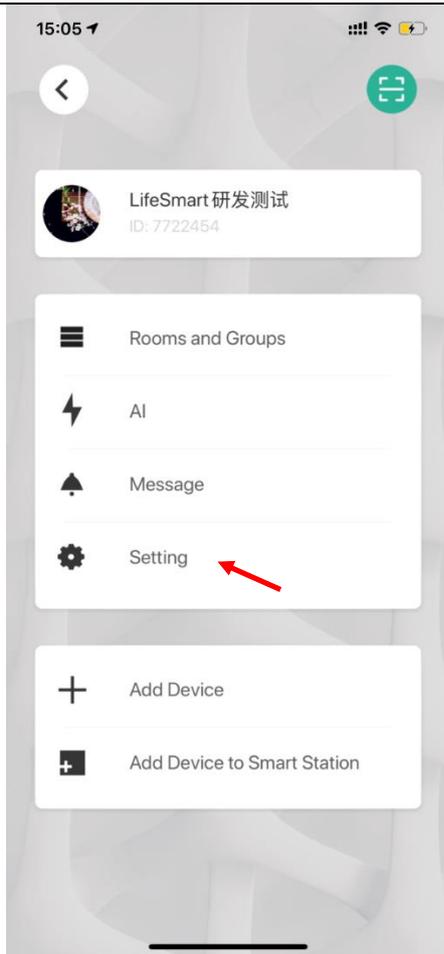


3.5.1 All Devices


You can review all your devices here, and see which room they belong to. You can also control or delete your device just like the way you operate on home page. Apart from that, you can check if the device works independently or works with Smart Station.

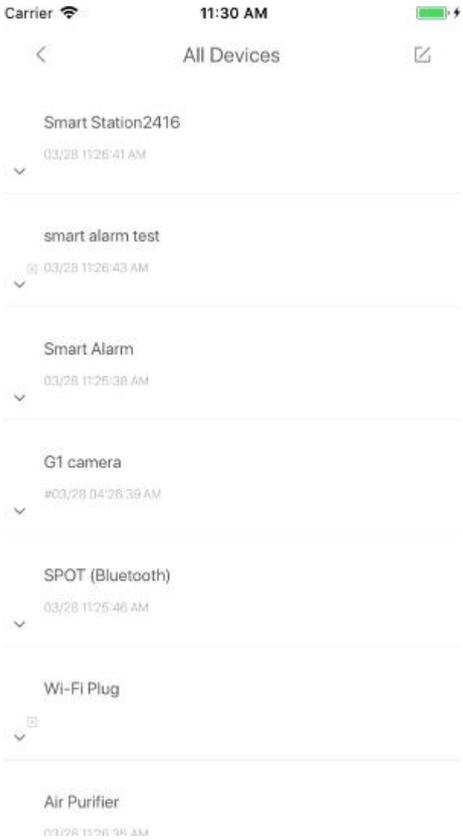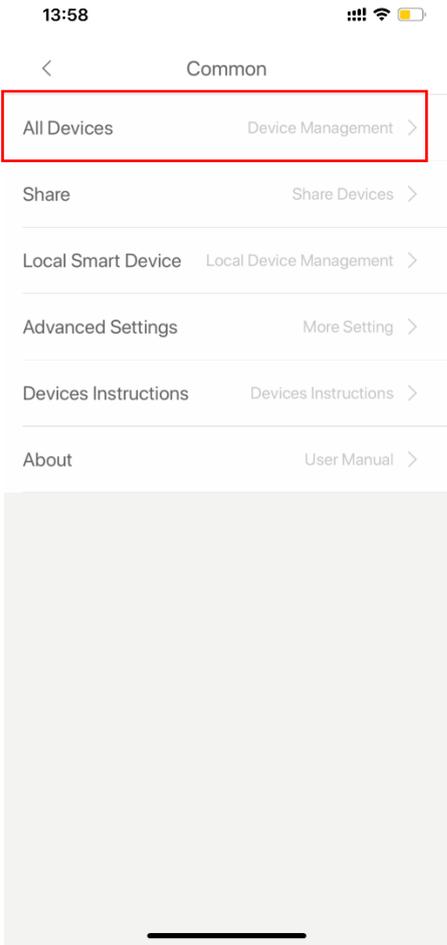

Click a device to view and edit its settings:

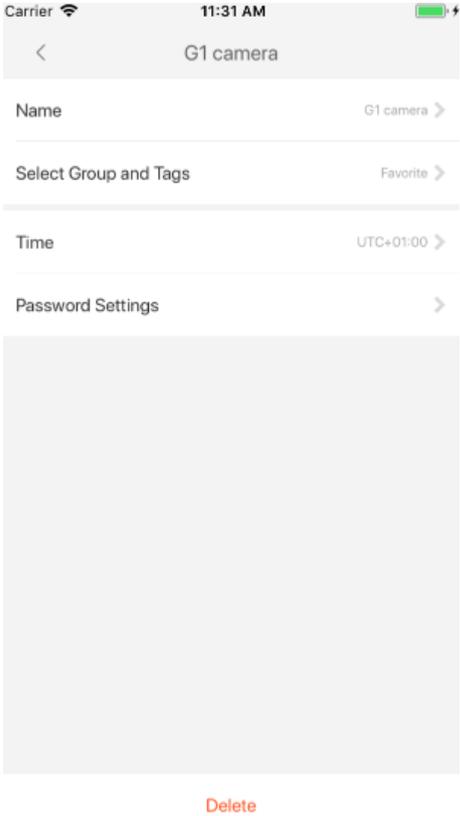

Click , if you want to delete any device just click the red remove button on the left.



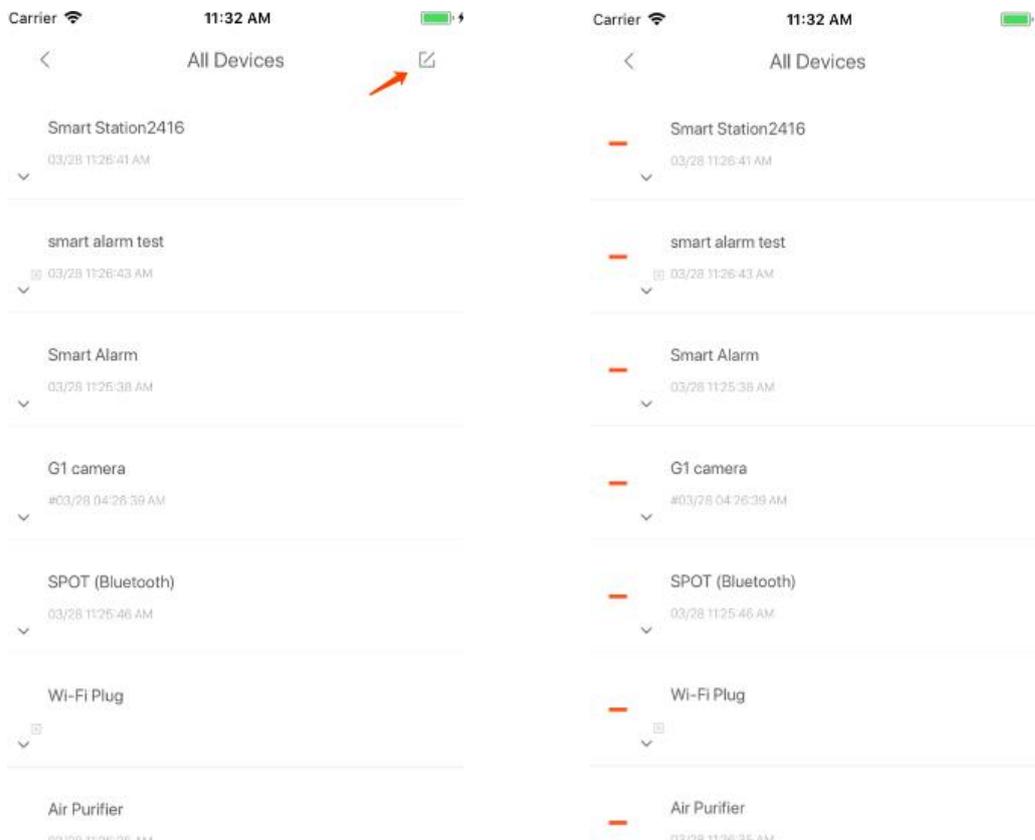


3. 5. 2 Share


Share function allows you to share your smart device control authorities to your friends. It simply creates a QR code of your smart devices, and your friends can control your devices by scanning the QR code through WeChat's linked application.

To use this function:

1) Click "Share" and then click "+", select the device(s) you want to share:

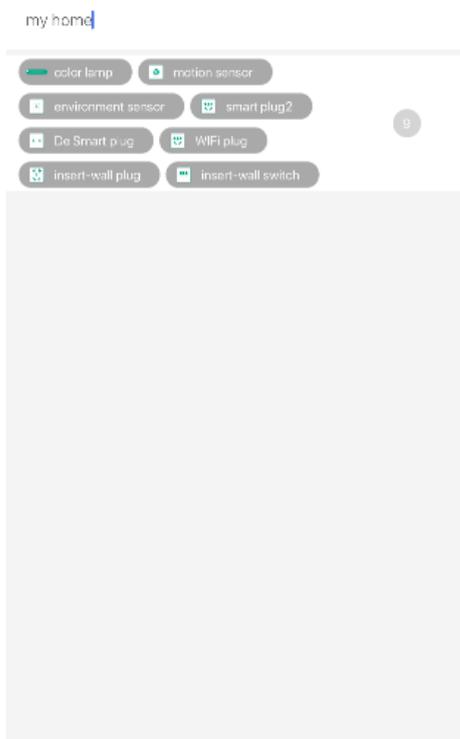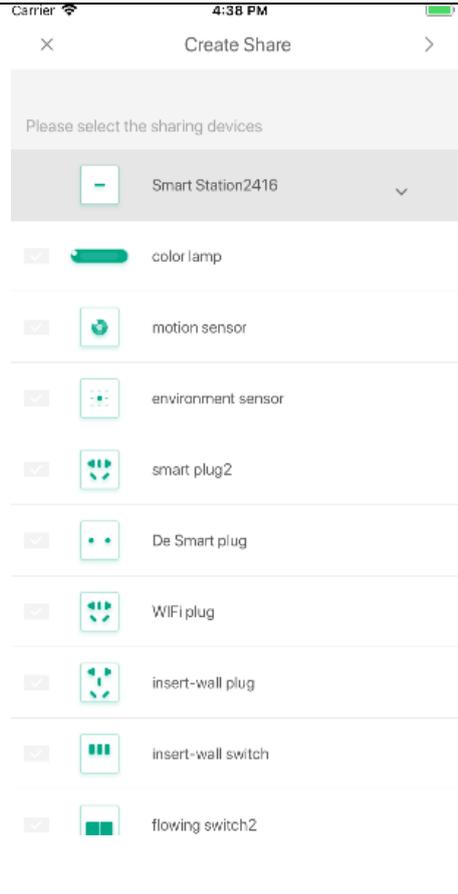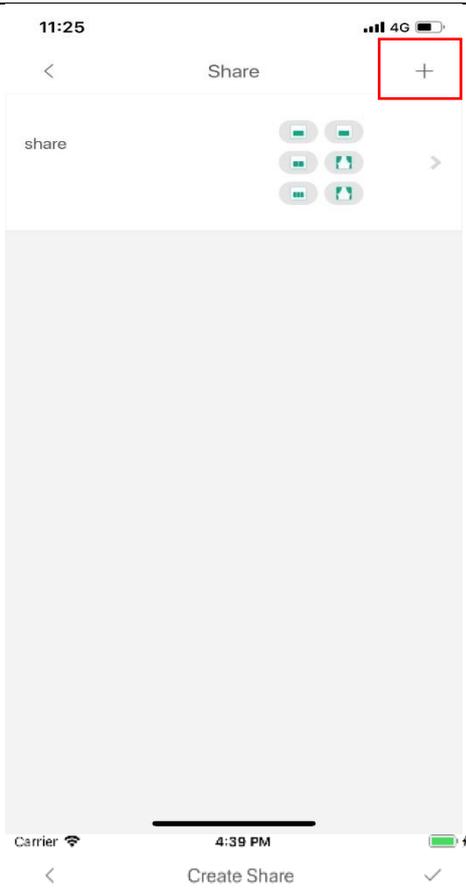


2) Click the arrow icon  on the top right, rename the share, then click tick icon  to get the QR code for your device(s). The one who receives the code can easily control your devices you shared after scanning the code in WeChat.

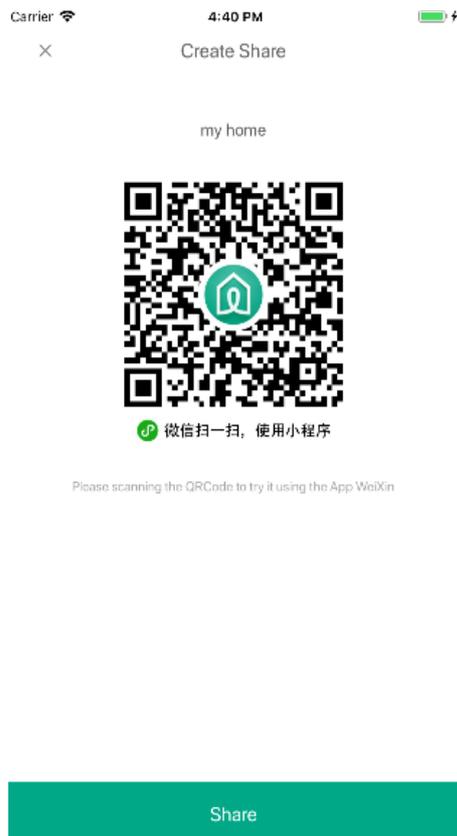

Tip: How to delete your share:



Enter 'Share' page, swipe left at the title of your shared devices:

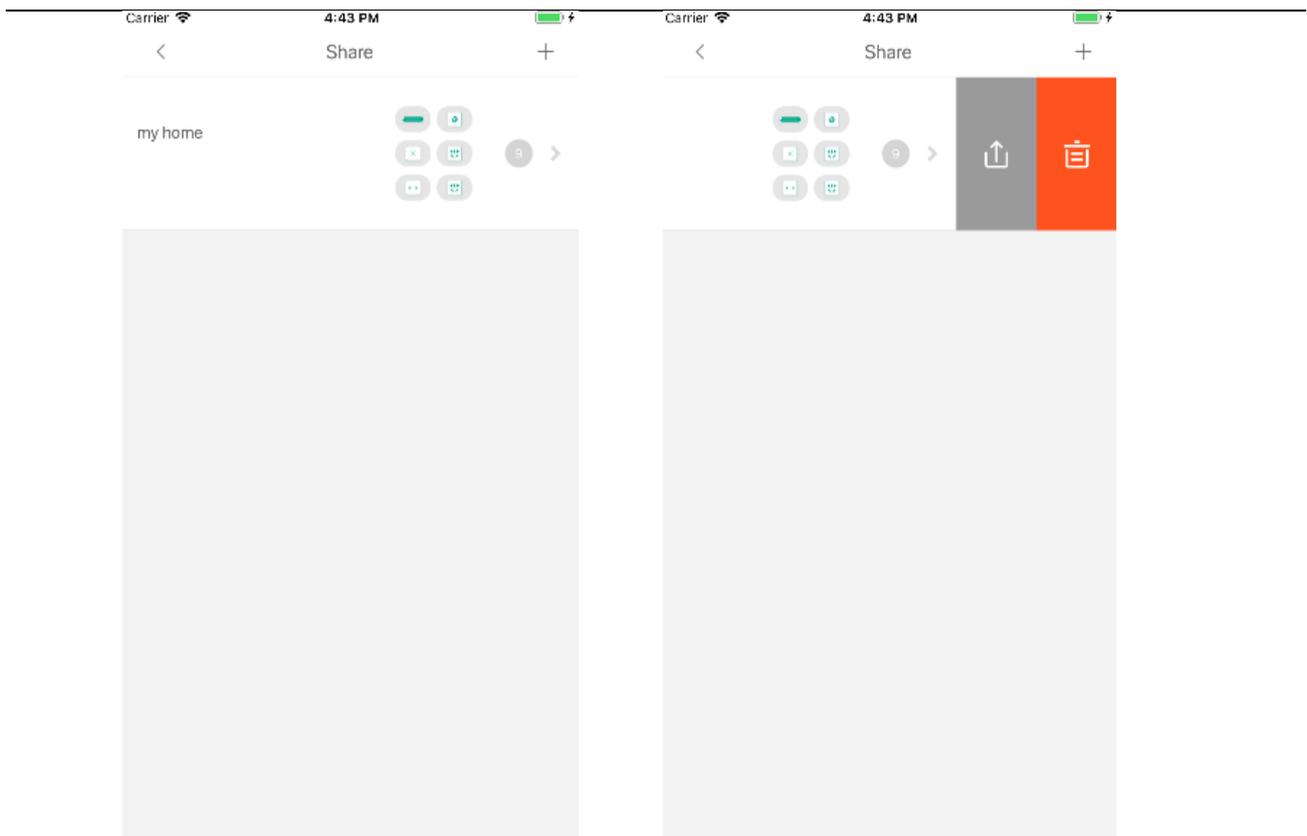

Click  to confirm a deletion. To share again, just click .


3. 5. 3 Local Smart Device

This is the function which allows users check and control local smart devices via LAN, it is useful when the Internet is down suddenly and users still want to control the devices.

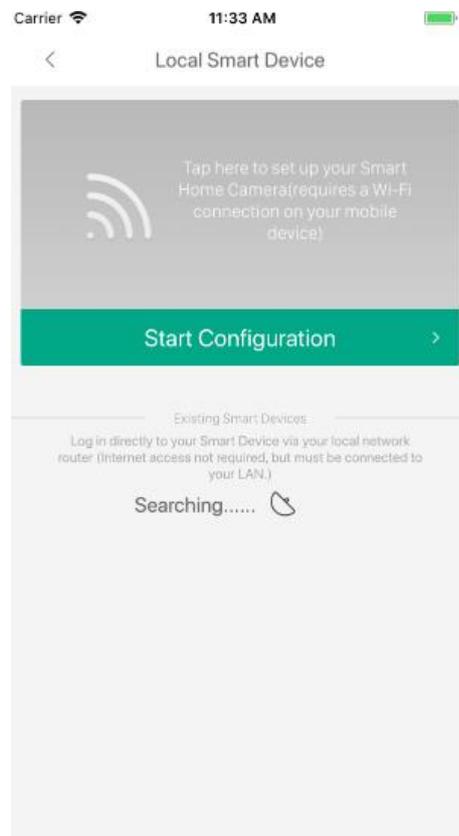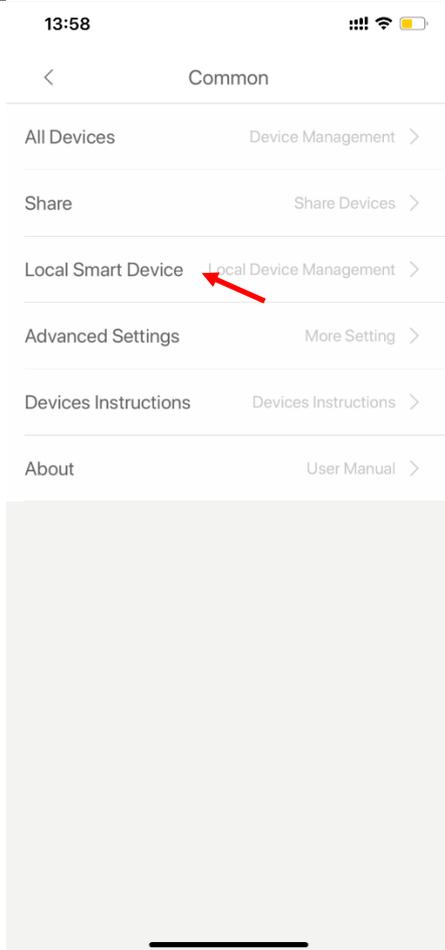


To use this function:

- 1) Connect the mobile phone to the same network as the smart station.
- 2) Enter "Local Smart Device", wait for the app to search for devices in the local network.
- 3) After searching, select the smart station you want to log in, click "login". You can choose if you want to set a password to get access to this device.

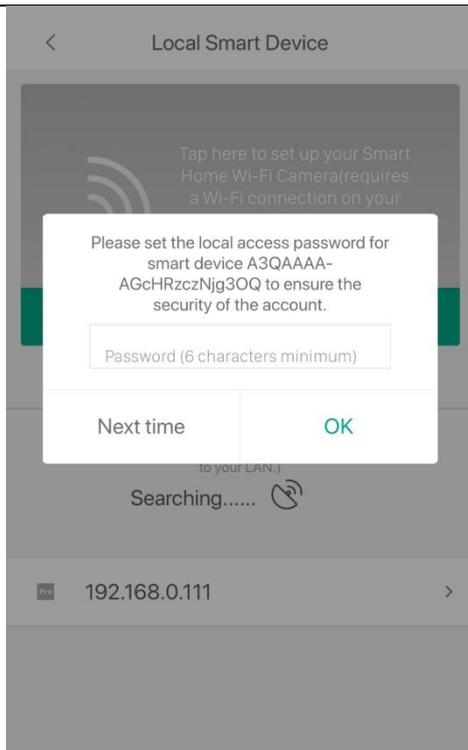

4) Once logged in, the interface is displayed as following:

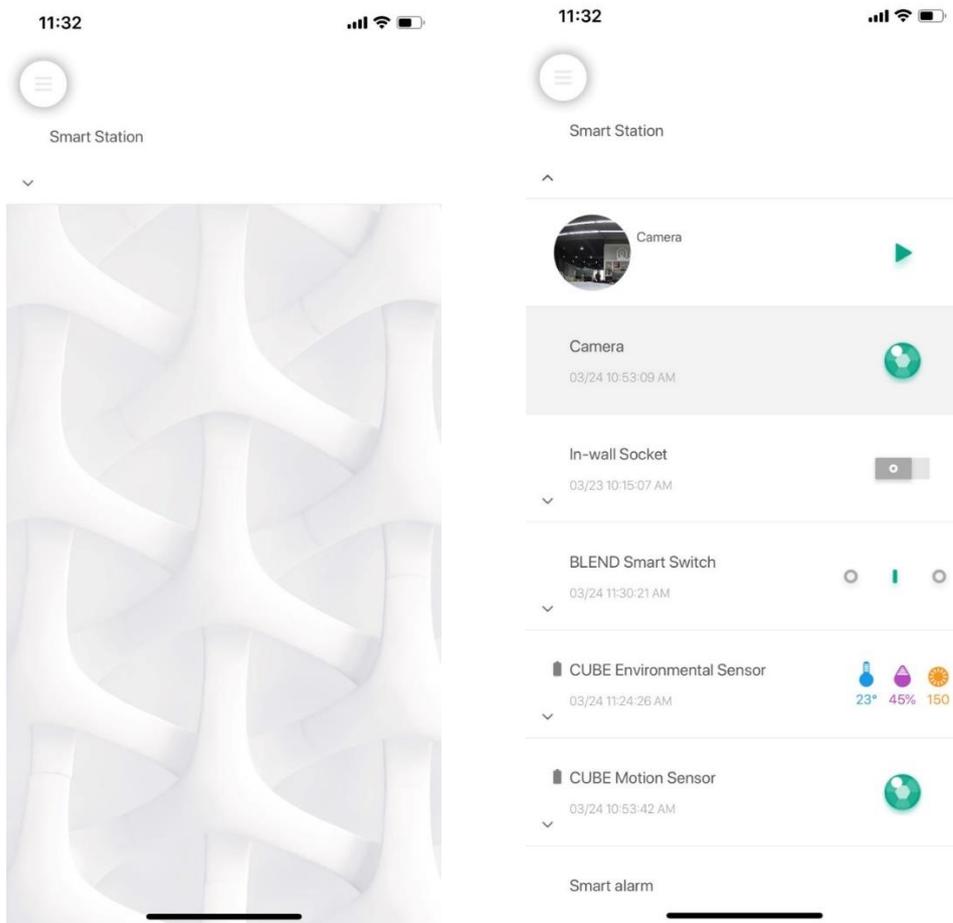


5) You can check your device's status here (if you log in to Smart Station through this way, you

can also add devices to your Smart Station locally here)


3. 5. 4 Advanced Settings

This is a setting manu for some advanced functions which includes check devices' details, upgrade or reboot devices etc. You can also set widgets to help manage your frequently used devices, access your recorded footage. In Engineering Mode, you can code telecom settings. Smart Station (Advanced) upgrade, backup and link to third-party devices .

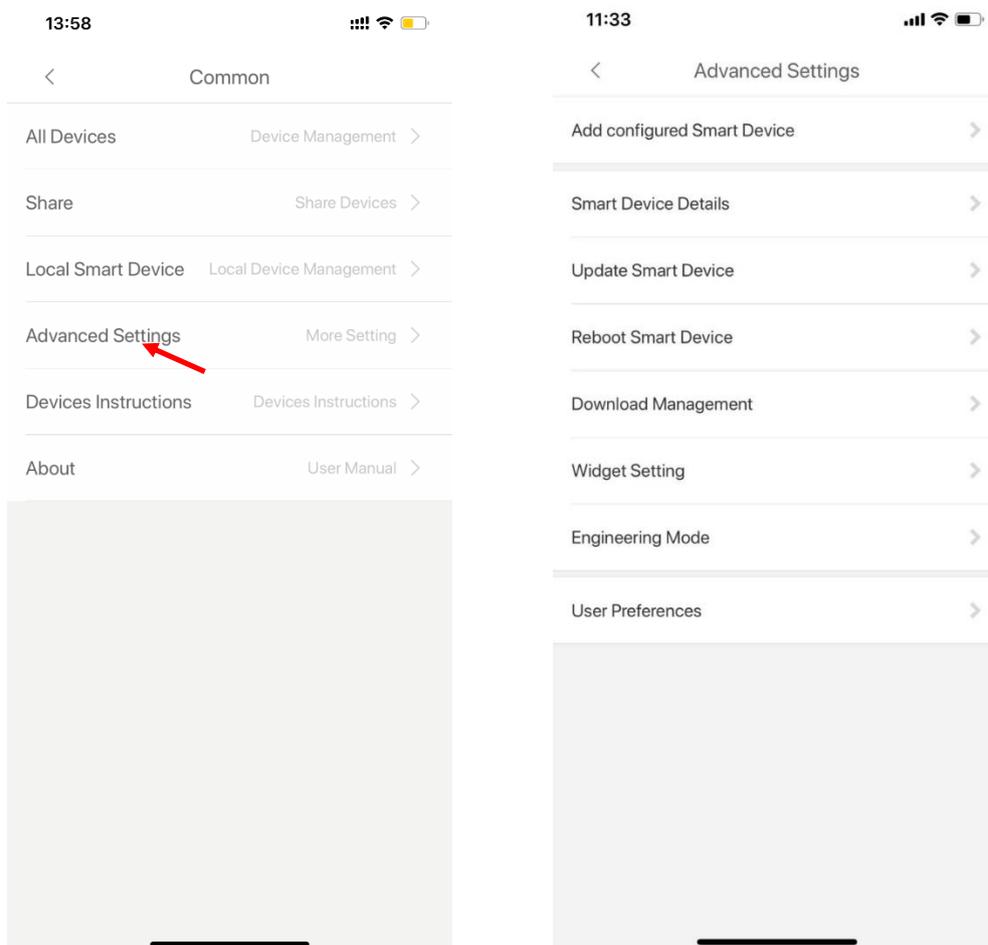


1) Add configured Smart Device

Here you can add smart station. If your mobile phone is in the same network with smart station, you can click 'search' for smart station. You can also choose scan bar code to add smart station

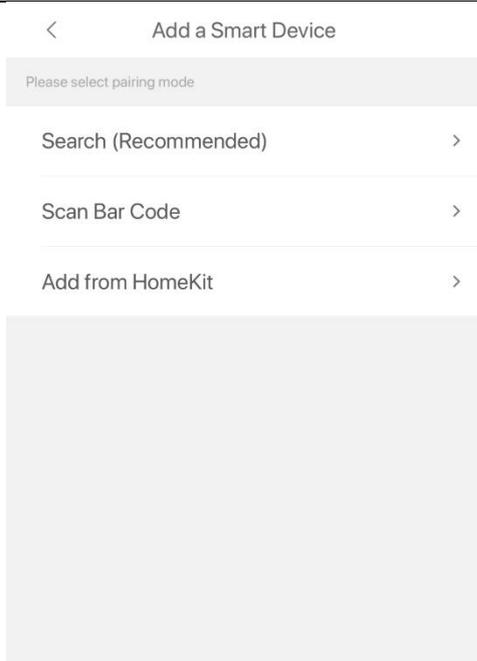


2) Smart Device Details

This page displays all detailed info of smart devices such as IP, firmware version etc.

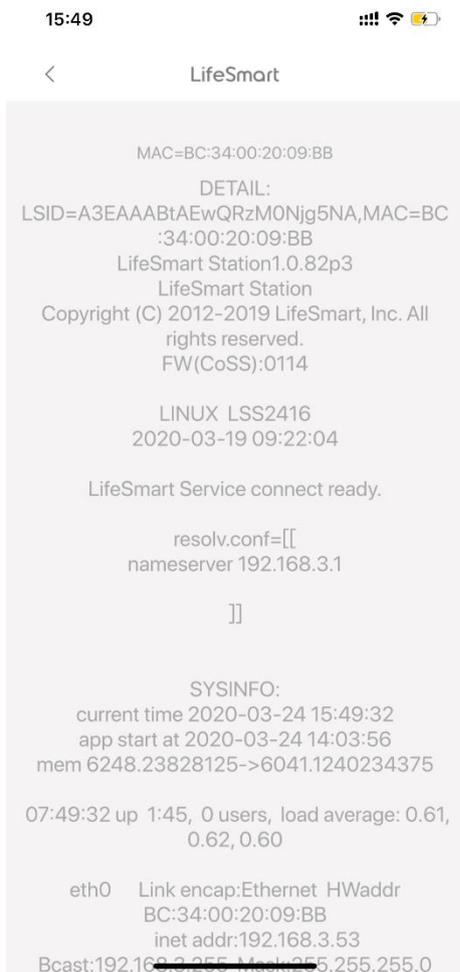

3) Update Smart Device

This is the function for users to check current device firmware version and upgrade their smart device when there is an update.

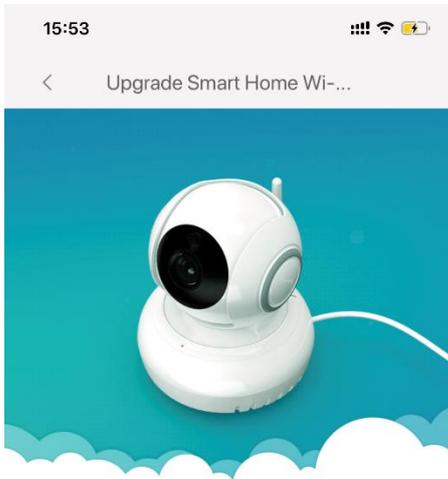

This device is already the latest version

Current version 1.0.46p6, please wait for an update next time.

Update

4) Download management

This is where all downloaded video clips stored.

5) Reboot Smart Devices

Users can manually reboot a smart device easily in this menu.


6) Widget Setting

This function is to create device or AI shortcut on phone's home page, so as to help users to easily manage frequently used devices.


To use this function:

- a. Click 'Widget Setting':

b. Click **+** to add devices or AIs displayed to your notification centre.

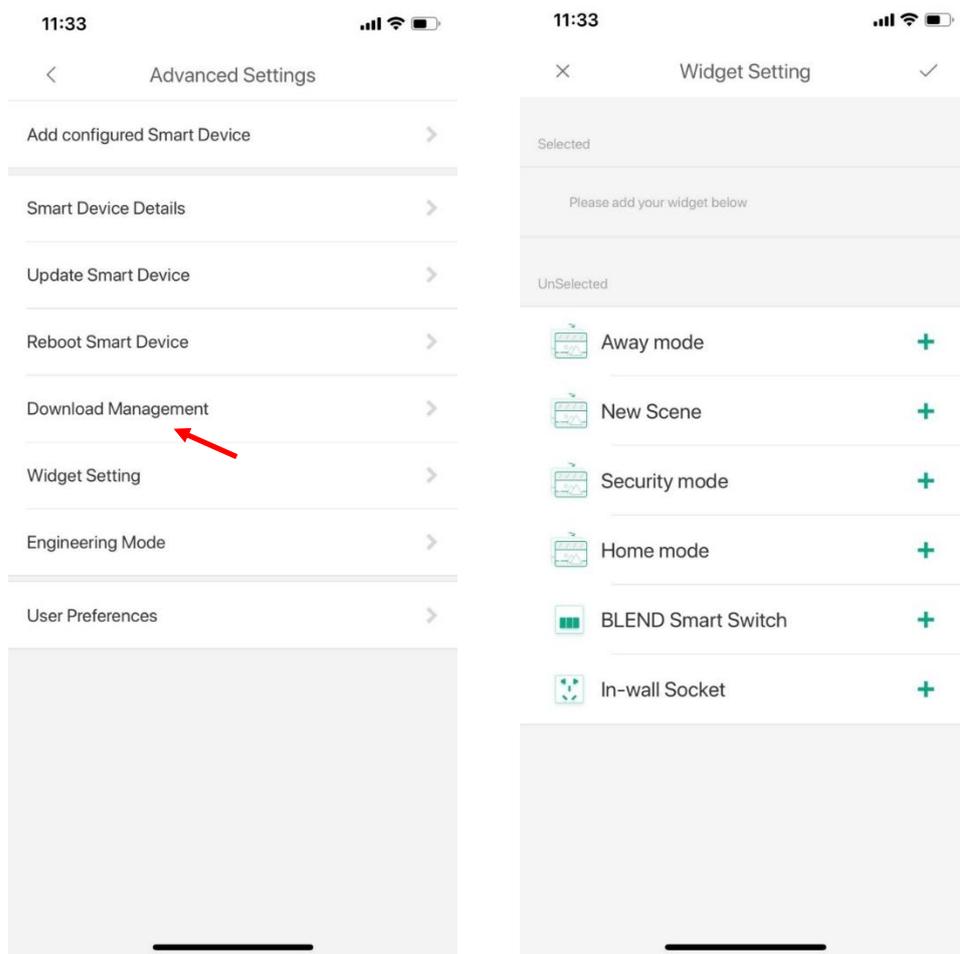


c. Swipe down from the top of your smart phone screen, you can manage your devices through this shortcut.

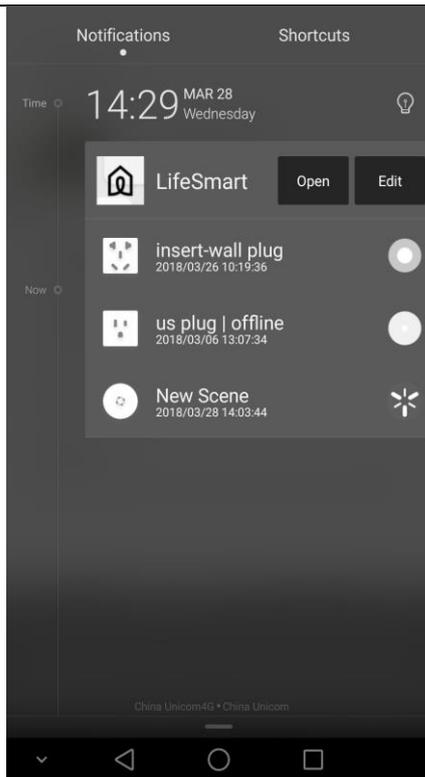

d. Click Edit to adjust.

7) Engineering Mode

This menu includes some engineering functions such as testing RSSI, editing telecom configurations, upgrade/backup/restore your smart station and add third party devices.

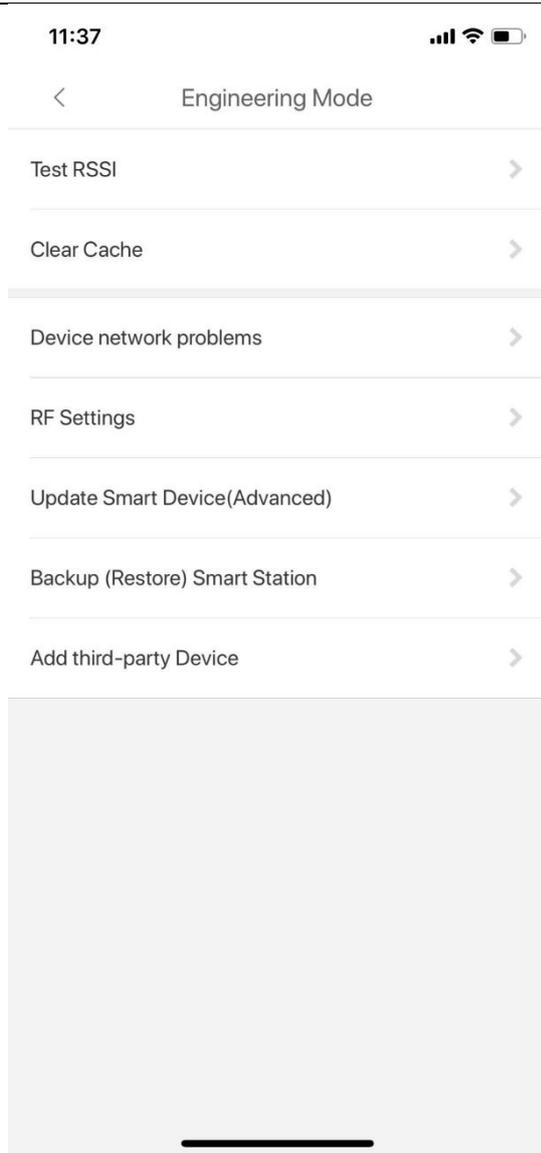

a. Testing RSSI

This function helps users to check the communication signal strength.

Click "Test RSSI", select a smart station, click "Refresh All".

Refresh All(18/36)			
Noise	Station>>	>>Station	Last
Smart Station2416			11:42:24 >
46			
De Smart plug			11:35:06 >
38	152	152	152
Formaldehyde			11:41:29 >
60	187	194	194
Smart Door Lock:Network timed out. Please try in a few minutes.			10:58:36 >
			141
Xi door lock:Network timed out. Please try in a few minutes.			16:44:21 >
			118
Ye door lock:Network timed out. Please try in a few minutes.			17:38:21 >
			153
color lamp			09:40:40 >
65	171	170	171
cube door sensor			11:41:52 >

The devices which are powered and work on CoSS protocol will be displayed with 4 parameters, including Noise, Station>>, >>Station and Last.

- I. **“Noise”** indicates the radio interference in the surroundings, the smaller the number (Usually smaller than 50) is, the less interference there is.
- II. **“Station>>”** indicates the signal strength from Station to Devices.
- III. **“>>Station”** indicates the signal strength from Devices to Station.
- IV. **“Last”** indicates the last signal strength detected. The bigger the number (usually bigger than 70 for battery powered device, bigger than 100 for plugged device) is, the stronger Strength there is.

If there is no respond after a refresh (excluding devices not on CoSS protocol), your device is offline.

b. Clear cache

This is where users can clear app cache

c. Device network problems

This is where users can detect their device network environment, It is not recommended to operate in this menu, please contact our customer service if you have any questions.

d. RF Settings

This is for adjusting device radio frequency settings, it may cause network unstable if operate incorrectly. It is not recommended to operate in this menu, please contact our customer service if you have any questions.


e. Update/Back up/Resore Smart Station/Devices

If failures occur on a Smart Station, users can prevent data loss by applying these fucntions. Please back up first, then you can use the config file to restore all the previous settings.

f. Add Third-party Devices: Add third party devices automatically or manually. (Speaker BGM and more to come)


8) User Preferences

This menu includes functions like app language setting, enable/disable learning code fuction of SPOT, enable/disable SIRI voice control shortcut and enable/disable app solo version(Solo version is the new style interface)

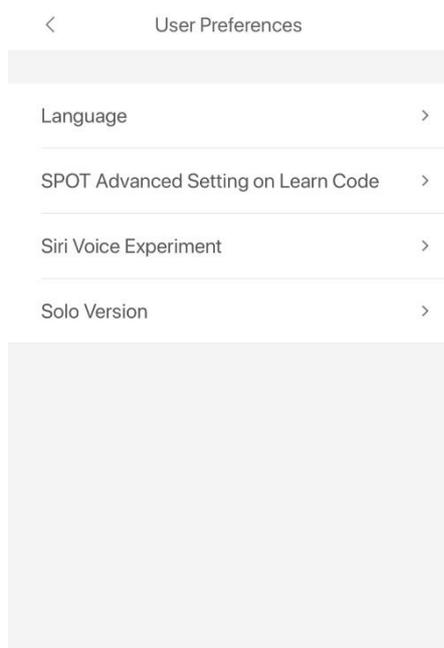


Device Instructions

Click “Device Instructions” on the app, it will lead to a webpage which includes instructions to all LifeSmart products, including features, specs, configurations, installations and FAQ.

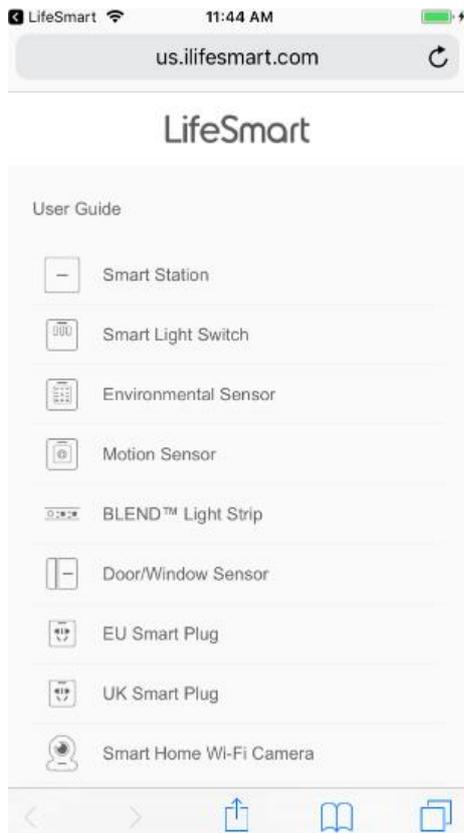

About


This function menu includes checking app version and updates, as well as jumping to LifeSmart official website, users can also leave feedbacks to us and contact us for help.

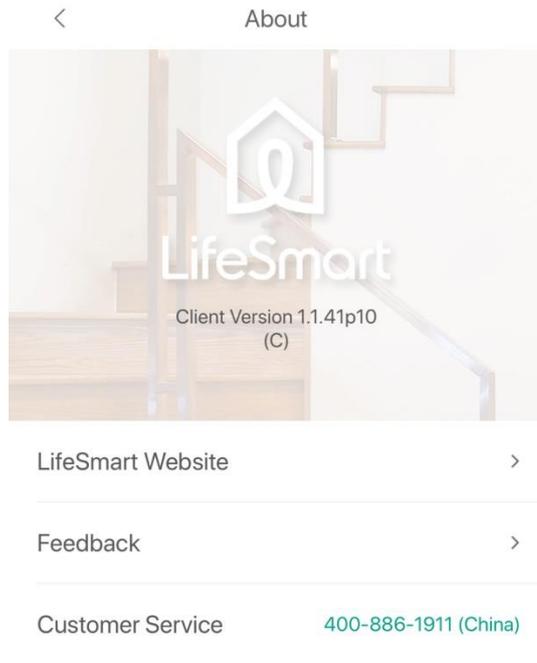


3.6 Add Device

To add a device to the app or to the smart station:


- 1) Click "Add Device":

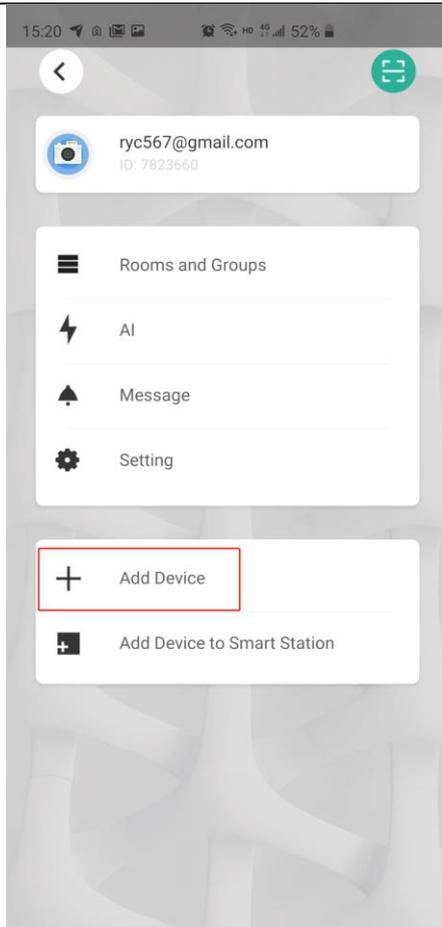

- 2) Choose the device you want to add. Here take adding SPOT as an example. Select the exact model you have (you can easily find the model number on the package of the product).

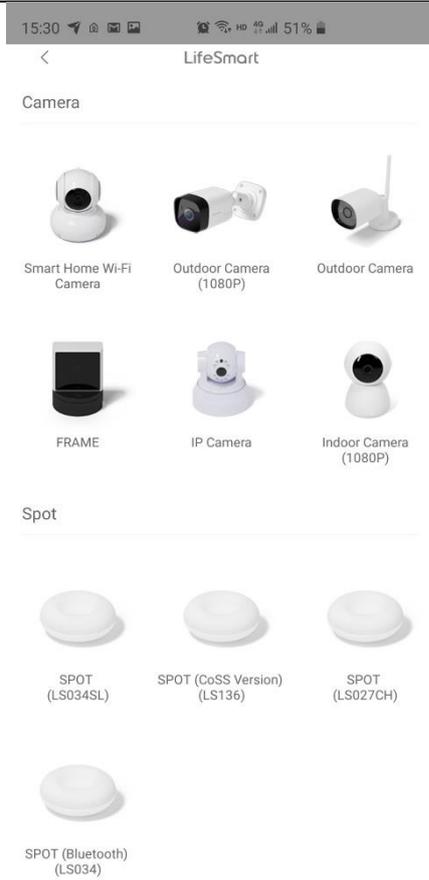

3) Follow up the pairing instructions on the app.

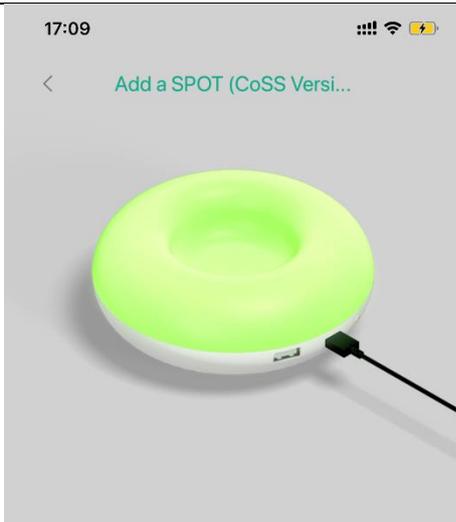

1. Press and hold the button of CoSS SPOT for 5 seconds, until the indicator flashes in green,
2. Pairing mode is active now.

Start Pairing

Note: If you do not add smart station before, there will be only limited devices appear in the list and some devices may not be able to pair.


3.7 Add Device to Smart Station

For WiFi devices that has already been connected to LAN, users can run auto search to add new devices to a smart station.


Note: WiFi devices must be added to a smart station so that they can be included in smart, scenes or triggers.

For example, if you added a camera, and now you would like to set triggers and smart scenes, you will need to add your camera to smart station.


- 1) Enter "Add Device to Smart Station" and choose a smart station.

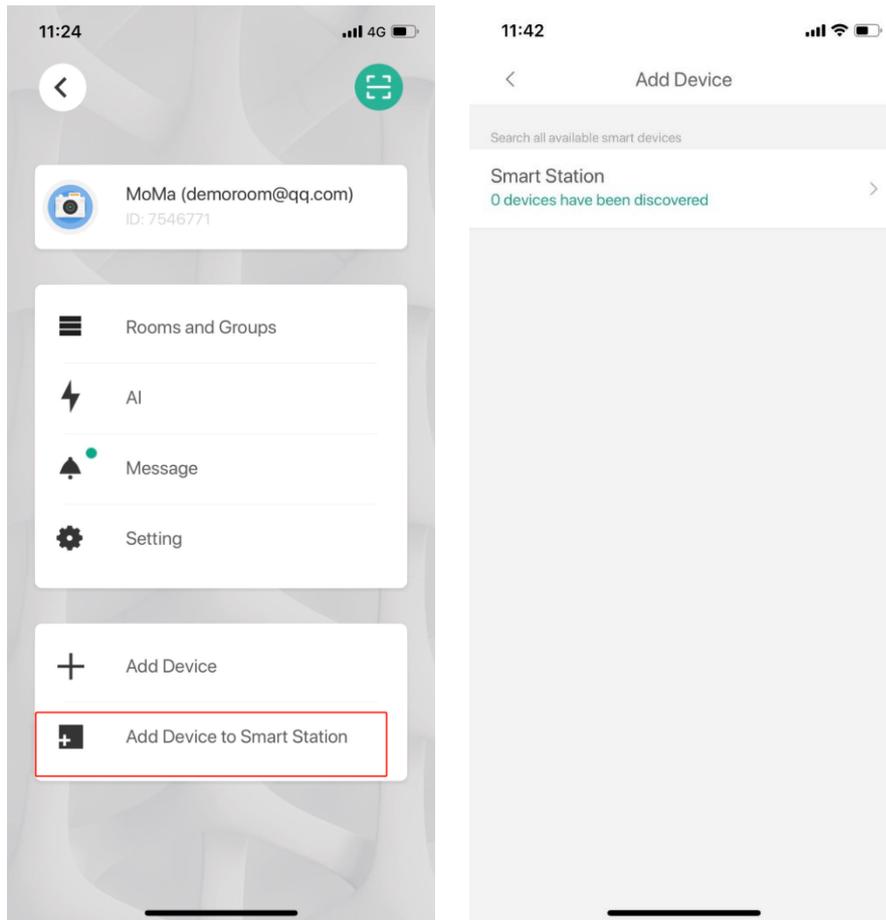

2) The app will then search devices that are in the same network with the smart station.

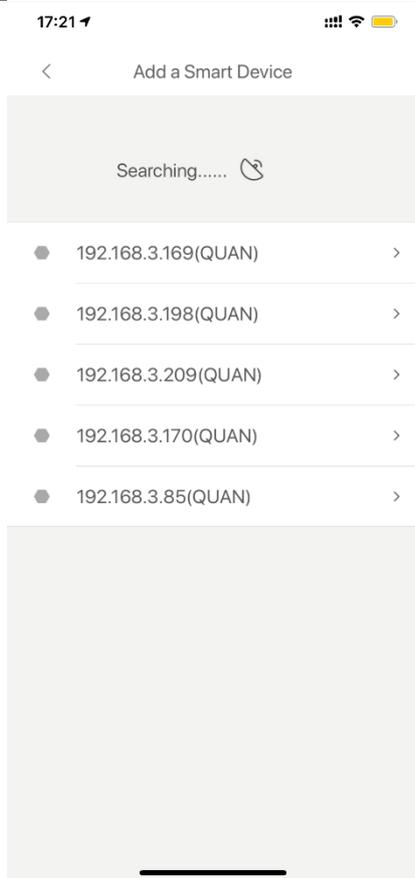

3) Select a device and give a name to it, select a group or room to display the device.

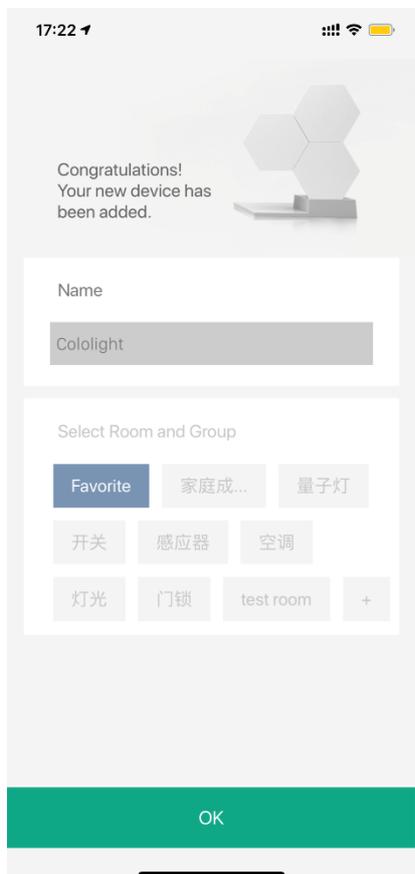

4) After adding the device can be viewed on home page.

There is also a Scan button on the top right corner of the main settings menu, it allows users to scan QR code to log in a Magic Mirror, or scan the QR code to add a smart station.

